aiwa

aiwa SERVICE

NSX-A888
NSX-S888

SERVICE MANUAL

COMPACT DISC STEREO
CASSETTE RECEIVER

• TYPE: U (A888),
LH (S888)

• Replace this Service Manual with "Revision Publishing" when it is issued.

S/M Code No. 09–991–408–0T1

ELECTRICAL MAIN PARTS LIST - 1/9

NOTE: The characters in the suffix column indicate the part usage.

LH .....XX.....A.....
U .....XX.....B.....

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
C 0	87-010-178-080		CHIP CAP 1000P	AB
C 606	87-010-112-080		CAP, ELECT 100-16V	AB
C 601	87-010-186-080		CAP,CHIP 4700P	AB
C 605	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 607	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 603	87-010-320-080		CHIP CAP 68P	AB
C 604	87-010-546-040		CAP,E 0.33-50	AB
C 602	87-015-699-040		CAP,E 10-50 7L	AB
C 652	87-010-183-080		C-CAP,S 2700P-50 B	AB
C 653	87-010-213-080		C-CAP,S 0.015-50 B	AB
FB 601	87-A50-190-080		C-COIL,S BLM21A102S	AB
J 601	87-A60-651-010		JACK,3.5MONO	AB
J 602	87-A60-651-010		JACK,3.5MONO	AB
Q 604	87-A30-075-080		C-TR,2SA1235F	AB
Q 602	87-A30-076-080		C-TR,2SC3052F	AB
Q 603	87-A30-076-080		C-TR,2SC3052F	AB
Q 601	87-A30-087-080		C-FET,2SK2158	AB
	8Z-NF5-207-010		HLDR,PWB PT	AB
C 1	87-010-387-080		CAP,E 470-25 SME	AB
C 9	87-016-520-090		CAP,E 3300-65	.B
C 8	87-016-520-090		CAP,E 3300-65	.B
C 9	87-016-657-090		CAP,E 3300-71	A
C 8	87-016-657-090		CAP,E 3300-71	A
C 5	87-A11-148-080		CAP,TC U 0.1-50 Z F	AB
C 4	87-A11-148-080		CAP,TC U 0.1-50 Z F	AB
C 6	87-A11-148-080		CAP,TC U 0.1-50 Z F	AB
C 3	87-A11-148-080		CAP,TC U 0.1-50 Z F	AB
C 31	87-010-403-080		CAP, ELECT 3.3-50V	AB
C 32	87-A10-479-080		CAP,CER 2200P-250 M E KH	AB
CN 1	87-A60-851-010		CONN,9P V VH	AB
D 3	87-020-465-080		DIODE,1SS133 (110MA)	AB
D 5	87-020-465-080		DIODE,1SS133 (110MA)	AB
D 1	87-020-465-080		DIODE,1SS133 (110MA)	AB
D 4	87-020-465-080		DIODE,1SS133 (110MA)	AB
D 2	87-020-465-080		DIODE,1SS133 (110MA)	AB
D 6	87-A40-547-090		DIODE,D5SBA20	.B
D 6	87-A40-549-090		DIODE,RBA-1002	A
D 32	87-020-465-080		DIODE,1SS133 (110MA)	AB
D 31	87-020-465-080		DIODE,1SS133 (110MA)	AB
PR 2	87-026-682-080		PROTECTOR,10A 60V491	A
PR 1	87-026-682-080		PROTECTOR,10A 60V491	A
PR 2	87-026-691-080		FUSE,10A 125V 251	.B
PR 1	87-026-691-080		FUSE,10A 125V 251	.B
PR 3	87-A91-276-080		FUSE,125MA 125V F 251	.B
PT 2	8Z-NF8-661-010		PT,SUB ZNF-8(U)	.B
PT 2	8Z-NF8-662-010		PT,SUB ZNF-8(E)	
PT 2	8Z-NF8-663-010		PT,SUB ZNF-8(H)	A
Q 31	87-026-245-080		TR,DTC114ES	AB
Q 32	87-A30-198-080		TR,KTC3199GR	AB
RY 2	87-A90-977-010		RELAY,AC12V DG12D1-O(M)	.B
RY 1	87-A91-281-010		RELAY,AC DC12V OSA-SS-212DM5	A
S 1	87-A90-165-010		SW,SL 1-2-3 SWS2301	A
T 2	87-A60-317-010		TERMINAL, 1P MSC	AB
T 1	87-A60-317-010		TERMINAL, 1P MSC	AB
*	88-NF6-205-010		GUIDE,FL 40-150- 9	AB
*	8Z-NF6-202-010		GUIDE,FUN	AB
*	8Z-NF6-203-010		GUIDE,OPE	AB
C 103	87-010-178-080		CHIP CAP 1000P	AB
C 106	87-010-311-080		CAP 12P	AB
C 105	87-010-316-080		C-CAP,S 33P-50 CH	AB
C 108	87-010-405-040		CAP,E 10-50	AB
C 107	87-012-157-080		C-CAP,S 330P-50 CH	AB
C 114	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 115	87-010-198-080		CAP, CHIP 0.022	AB
C 116	87-010-493-040		CAP,E 0.47-50 GAS	AB
C 117	87-010-498-040		CAP,E 10-16 GAS	AB
C 112	87-016-081-080		C-CAP,S 0.1-16 RK	AB
C 118	87-A11-242-040		CAP,E 220-10 M 5L SRM	AB
C 113	87-A11-242-040		CAP,E 220-10 M 5L SRM	AB
C 122	87-010-178-080		CHIP CAP 1000P	AB
C 124	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 126	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 123	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 125	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 121	87-012-368-080		C-CAP,S 0.1-50 F	AB
C 153	87-010-196-080		CHIP CAPACITOR,0.1-25	AB
C 154	87-010-264-040		CAP,E 100-10 5L	AB
C 151	87-012-369-080		C-CAP,S 0.047-50F	AB
C 186	87-010-182-080		C-CAP,S 2200P-50 B	AB
C 185	87-010-197-080		CAP, CHIP 0.01 DM	AB
C 181	87-012-157-080		C-CAP,S 330P-50 CH	AB
C 202	87-012-140-080		CAP 470P	AB
C 223	87-010-408-040		CAP,E 47-50 SME	AB
C 222	87-010-421-040		CAP,E 4.7-50 5L	AB
C 221	87-010-421-040		CAP,E 4.7-50 5L	AB

C	224	87-012-369-080	C-CAP,S 0.047-50F	AB
C	383	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	385	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	386	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	381	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	387	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	384	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	382	87-012-158-080	C-CAP,S 390P-50 CH	AB
C	402	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	401	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	404	87-010-319-080	C-CAP,S 56P-50 CH	AB
C	403	87-010-319-080	C-CAP,S 56P-50 CH	AB
C	405	87-010-319-080	C-CAP,S 56P-50 CH	AB
C	408	87-010-322-080	C-CAP,S 100P-50 CH	AB
C	407	87-010-322-080	C-CAP,S 100P-50 CH	AB
C	406	87-010-322-080	C-CAP,S 100P-50 CH	AB
C	702	87-A10-818-040	CAP,E 100-16 7LSRA SERIES	AB
C	701	87-A10-818-040	CAP,E 100-16 7LSRA SERIES	AB
CN	101	87-099-720-010	CONN,30P TYK-B(P)	AB
CN	104	87-A60-140-010	CONN,15P V FE	AB
CN	301	87-A60-131-010	CONN,6P V FE	AB
CN	302	87-A60-154-010	CONN,6P H FE	AB
CN	901	87-099-030-010	CONN,13P 6216H	AB
D	103	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	108	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	104	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	101	87-020-465-080	DIODE,1SS133 (110MA)	..
D	107	87-A40-270-080	C-DIODE,MC2838	AB
D	109	87-A40-509-080	ZENER,MTZJ6.8C	AB
D	111	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	301	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	306	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	307	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	303	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	308	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	305	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	304	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	302	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	309	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	313	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	318	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	315	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	316	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	310	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	312	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	314	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	311	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	320	87-020-465-080	DIODE,1SS133 (110MA)	..
D	328	87-020-465-080	DIODE,1SS133 (110MA)	..
D	327	87-020-465-080	DIODE,1SS133 (110MA)	..
D	325	87-020-465-080	DIODE,1SS133 (110MA)	..
D	385	87-017-932-080	ZENER,MTJ6.2B	AB
D	382	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	383	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	384	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	381	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	701	87-A40-269-080	C-DIODE,MC2836	AB
D	901	87-020-465-080	DIODE,1SS133 (110MA)	..
FL	201	8Z-NF6-601-010	FL,BJ687GK-ZNF6	AB
IC	103	87-A20-951-010	IC,TSOP1838RF1	AB
IC	101	8Z-NF7-605-010	C-IC,LC876572W-****	AB
IC	380	87-A21-023-040	C-IC,BA3835F	AB
IC	401	87-A21-021-040	C-IC,BU2099FV	AB
IC	402	87-A21-021-040	C-IC,BU2099FV	AB
L	101	87-A50-333-010	COIL,OSC 9.43MHZ	AB
LED	293	87-A40-589-040	LED,SLR-56VCT31 RED	AB
LED	409	87-017-350-080	LED,SEL1550CM	AB
LED	406	87-017-350-080	LED,SEL1550CM	AB
LED	408	87-017-350-080	LED,SEL1550CM	AB
LED	407	87-017-350-080	LED,SEL1550CM	AB
LED	401	87-A40-317-080	LED,SLR-342VCT31 RED	AB
LED	403	87-A40-317-080	LED,SLR-342VCT31 RED	AB
LED	404	87-A40-317-080	LED,SLR-342VCT31 RED	AB
LED	405	87-A40-317-080	LED,SLR-342VCT31 RED	AB
LED	402	87-A40-317-080	LED,SLR-342VCT31 RED	AB
LED	414	87-017-350-080	LED,SEL1550CM	AB
LED	410	87-017-350-080	LED,SEL1550CM	AB
LED	411	87-017-350-080	LED,SEL1550CM	AB
LED	413	87-017-350-080	LED,SEL1550CM	AB
LED	412	87-017-350-080	LED,SEL1550CM	AB
LED	415	87-017-350-080	LED,SEL1550CM	AB
LED	417	87-A40-607-080	LED,SLR-56PTTB7 PG	AB
LED	416	87-A40-607-080	LED,SLR-56PTTB7 PG	AB
LED	418	87-A40-607-080	LED,SLR-56PTTB7 PG	AB
LED	419	87-A40-607-080	LED,SLR-56PTTB7 PG	AB
LED	420	87-A40-607-080	LED,SLR-56PTTB7 PG	AB
LED	421	87-A40-607-080	LED,SLR-56PTTB7 PG	AB
LED	434	87-A40-563-010	LED,SEL6515C-LF62 PGRN	AB
LED	433	87-A40-563-010	LED,SEL6515C-LF62 PGRN	AB
LED	435	87-A40-563-010	LED,SEL6515C-LF62 PGRN	AB
LED	436	87-A40-563-010	LED,SEL6515C-LF62 PGRN	AB
LED	440	87-A40-608-040	LED,SLV-312VC RED	AB

LED	441	87-A40-608-040	LED,SLV-312VC RED	AB
LED	442	87-A40-608-040	LED,SLV-312VC RED	AB
LED	443	87-A40-609-040	LED,SLV-312MC PG	AB
LED	447	87-A40-609-040	LED,SLV-312MC PG	AB
LED	444	87-A40-609-040	LED,SLV-312MC PG	AB
LED	446	87-A40-609-040	LED,SLV-312MC PG	AB
LED	445	87-A40-609-040	LED,SLV-312MC PG	AB
LED	448	87-A40-609-040	LED,SLV-312MC PG	AB
LED	462	87-A40-564-010	LED,SEL6215S-LF62 RED	AB
LED	461	87-A40-564-010	LED,SEL6215S-LF62 RED	AB
LED	485	87-A40-619-040	LED,SLR-56PT-T31-W GRN	AB
LED	486	87-A40-619-040	LED,SLR-56PT-T31-W GRN	AB
LED	482	87-A40-619-040	LED,SLR-56PT-T31-W GRN	AB
LED	487	87-A40-619-040	LED,SLR-56PT-T31-W GRN	AB
LED	484	87-A40-619-040	LED,SLR-56PT-T31-W GRN	AB
LED	483	87-A40-619-040	LED,SLR-56PT-T31-W GRN	AB
LED	481	87-A40-619-040	LED,SLR-56PT-T31-W GRN	AB
LED	488	87-A40-619-040	LED,SLR-56PT-T31-W GRN	AB
Q	102	87-026-610-080	TR,KTC3198GR	AB
Q	108	87-A30-073-080	C-TR,RT1N 141C	AB
Q	101	87-A30-087-080	C-FET,2SK2158	AB
Q	104	87-A30-087-080	C-FET,2SK2158	AB
Q	103	87-A30-087-080	C-FET,2SK2158	AB
Q	262	87-A30-159-080	C-TR,KTA1298Y	AB
Q	301	87-A30-076-080	C-TR,2SC3052F	AB
Q	703	87-A30-159-080	C-TR,KTA1298Y	AB
Q	702	87-A30-159-080	C-TR,KTA1298Y	AB
Q	701	87-A30-240-080	TR,CSA1585BC	AB
R	209	87-012-157-080	C-CAP,S 330P-50 CH	AB
S	101	87-A90-535-010	SW,RTRY EC16B24304	AB
S	102	87-A90-982-010	SW,RTRY REO121-30	AB
S	305	87-A91-024-080	SW,TACT KSH0611BT	
S	306	87-A91-024-080	SW,TACT KSH0611BT	
S	302	87-A91-024-080	SW,TACT KSH0611BT	AB
S	308	87-A91-024-080	SW,TACT KSH0611BT	AB
S	304	87-A91-024-080	SW,TACT KSH0611BT	
S	303	87-A91-024-080	SW,TACT KSH0611BT	AB
S	301	87-A91-024-080	SW,TACT KSH0611BT	AB
S	309	87-A91-024-080	SW,TACT KSH0611BT	AB
S	310	87-A91-024-080	SW,TACT KSH0611BT	AB
S	314	87-A91-024-080	SW,TACT KSH0611BT	AB
S	311	87-A91-024-080	SW,TACT KSH0611BT	AB
S	313	87-A91-024-080	SW,TACT KSH0611BT	AB
S	312	87-A91-024-080	SW,TACT KSH0611BT	AB
S	315	87-A91-024-080	SW,TACT KSH0611BT	AB
S	324	87-A91-024-080	SW,TACT KSH0611BT	AB
S	326	87-A91-024-080	SW,TACT KSH0611BT	AB
S	327	87-A91-024-080	SW,TACT KSH0611BT	AB
S	323	87-A91-024-080	SW,TACT KSH0611BT	AB
S	328	87-A91-024-080	SW,TACT KSH0611BT	AB
S	325	87-A91-024-080	SW,TACT KSH0611BT	AB
S	321	87-A91-024-080	SW,TACT KSH0611BT	AB
S	322	87-A91-024-080	SW,TACT KSH0611BT	AB
S	329	87-A91-024-080	SW,TACT KSH0611BT	AB
S	335	87-A91-024-080	SW,TACT KSH0611BT	AB
S	333	87-A91-024-080	SW,TACT KSH0611BT	AB
S	334	87-A91-024-080	SW,TACT KSH0611BT	AB
S	332	87-A91-024-080	SW,TACT KSH0611BT	AB
S	344	87-A91-024-080	SW,TACT KSH0611BT	AB
S	346	87-A91-024-080	SW,TACT KSH0611BT	AB
S	347	87-A91-024-080	SW,TACT KSH0611BT	
S	343	87-A91-024-080	SW,TACT KSH0611BT	AB
S	348	87-A91-024-080	SW,TACT KSH0611BT	AB
S	345	87-A91-024-080	SW,TACT KSH0611BT	AB
S	341	87-A91-024-080	SW,TACT KSH0611BT	AB
S	342	87-A91-024-080	SW,TACT KSH0611BT	AB
S	349	87-A91-024-080	SW,TACT KSH0611BT	AB
S	351	87-A91-024-080	SW,TACT KSH0611BT	AB
S	350	87-A91-024-080	SW,TACT KSH0611BT	AB
S	354	87-A91-024-080	SW,TACT KSH0611BT	AB
S	353	87-A91-024-080	SW,TACT KSH0611BT	AB
S	352	87-A91-024-080	SW,TACT KSH0611BT	AB
S	355	87-A91-024-080	SW,TACT KSH0611BT	AB
C	802	87-010-176-080	C-CAP,S 680P-50 SL	AB
C	803	87-010-187-080	CAP CHIP S5600P	AB
C	807	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	804	87-010-213-080	C-CAP,S 0.015-50 B	AB
C	806	87-010-401-040	CAP,E 1-50 SME	AB
C	809	87-012-155-080	C-CAP 180P-50CH	AB
C	801	87-012-156-080	C-CAP,S 220P-50 CH	AB
C	810	87-010-263-040	CAP,E 100-10	AB
C	811	87-010-382-080	CAP, ELECT 22-25V	AB
C	812	87-010-405-040	CAP,E 10-50	AB
D	801	87-017-931-080	ZENER,MTZJ5.6B	AB
IC	801	87-A21-051-040	C-IC,BU9990-03FS	AB
L	801	87-A50-093-010	COIL,CLOCK 5.76MHZ	AB
C	307	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	309	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	301	87-010-318-080	C-CAP,S 47P-50 CH	AB
C	302	87-010-318-080	C-CAP,S 47P-50 CH	AB
C	306	87-012-145-080	CAP, CHIP S 270P CH	
C	305	87-012-145-080	CAP, CHIP S 270P CH	

C	303	87-012-157-080	C-CAP,S 330P-50 CH	AB
C	306	87-012-157-080	C-CAP,S 330P-50 CH	AB
C	305	87-012-157-080	C-CAP,S 330P-50 CH	AB
C	304	87-012-157-080	C-CAP,S 330P-50 CH	AB
C	313	87-010-178-080	CHIP CAP 1000P	AB
C	314	87-010-178-080	CHIP CAP 1000P	AB
C	315	87-010-178-080	CHIP CAP 1000P	AB
C	316	87-010-178-080	CHIP CAP 1000P	AB
C	314	87-010-179-080	CAP,CHIP S B1200P	
C	313	87-010-179-080	CAP,CHIP S B1200P	
C	310	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	312	87-010-198-080	CAP, CHIP 0.022	AB
C	311	87-010-198-080	CAP, CHIP 0.022	AB
C	319	87-012-141-080	CHIP-CAPACITOR,0.22-16F	
C	317	87-012-142-080	CAP, S 0.33-16	
C	318	87-012-142-080	CAP, S 0.33-16	
C	324	87-010-260-080	CAP, ELECT 47-25V	AB
C	325	87-010-370-080	CAP,E 330-6.3 SME	AB
C	328	87-010-404-080	CAP, ELECT 4.7-50V	AB
C	327	87-010-404-080	CAP, ELECT 4.7-50V	AB
C	320	87-012-141-080	CHIP-CAPACITOR,0.22-16F	
C	321	87-012-142-080	CAP, S 0.33-16	AB
C	322	87-012-142-080	CAP, S 0.33-16	AB
C	337	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	339	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	332	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	335	87-010-401-080	CAP, ELECT 1-50V	AB
C	336	87-010-401-080	CAP, ELECT 1-50V	AB
C	340	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	354	87-010-175-080	CAP 560P	AB
C	359	87-010-183-080	C-CAP,S 2700P-50 B	AB
C	358	87-010-183-080	C-CAP,S 2700P-50 B	AB
C	357	87-010-197-080	CAP, CHIP 0.01 DM	AB
C	356	87-010-260-080	CAP, ELECT 47-25V	AB
C	351	87-012-140-080	CAP 470P	AB
C	352	87-012-140-080	CAP 470P	AB
C	355	87-012-349-080	C-CAP,S 1000P-50 CH	AB
C	360	87-010-183-080	C-CAP,S 2700P-50 B	AB
C	363	87-A10-292-080	CAP,M 5600P-50 J	AB
C	372	87-010-175-080	CAP 560P	
C	371	87-010-175-080	CAP 560P	
C	373	87-010-179-080	CAP,CHIP S B1200P	
C	374	87-010-179-080	CAP,CHIP S B1200P	
C	370	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	378	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	379	87-010-382-080	CAP, ELECT 22-25V	AB
C	375	87-010-545-080	CAP, ELECT 0.22-50V	
C	376	87-010-545-080	CAP, ELECT 0.22-50V	
C	373	87-016-083-080	C-CAP,S 0.15-16 RK	AB
C	374	87-016-083-080	C-CAP,S 0.15-16 RK	AB
C	385	87-010-184-080	CHIP CAPACITOR 3300P(K)	
C	386	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	381	87-010-197-080	CAP, CHIP 0.01 DM	AB
C	383	87-010-197-080	CAP, CHIP 0.01 DM	AB
C	382	87-010-312-080	C-CAP,S 15P-50 CH	AB
C	382	87-010-318-080	C-CAP,S 47P-50 CH	
C	380	87-010-382-080	CAP, ELECT 22-25V	AB
C	384	87-010-402-080	CAP, ELECT 2.2-50V	AB
C	387	87-012-145-080	CAP, CHIP S 270P CH	AB
C	388	87-012-156-080	C-CAP,S 220P-50 CH	AB
C	394	87-010-319-080	C-CAP,S 56P-50 CH	AB
C	393	87-010-319-080	C-CAP,S 56P-50 CH	AB
C	392	87-010-319-080	C-CAP,S 56P-50 CH	AB
C	391	87-010-319-080	C-CAP,S 56P-50 CH	AB
C	393	87-012-145-080	CAP, CHIP S 270P CH	
C	391	87-012-145-080	CAP, CHIP S 270P CH	
C	392	87-012-145-080	CAP, CHIP S 270P CH	
C	394	87-012-145-080	CAP, CHIP S 270P CH	
CN	301	87-099-827-010	CONN,3P S2M-3W	AB
CN	351	87-099-832-010	CONN,8P S2M-8W	AB
D	352	87-A40-269-080	C-DIODE,MC2836	AB
FB	301	87-008-372-080	FILTER, EMI BL OIRNI	
IC	302	87-A20-355-010	IC,CXA1553P	
IC	303	87-A20-783-040	C-IC,BA7762AFS	AB
L	302	87-A50-049-010	COIL,TRAP 85K(COI)	AB
L	301	87-A50-049-010	COIL,TRAP 85K(COI)	AB
L	351	87-007-342-010	COIL,OSC 85K BIAS	AB
Q	357	87-026-610-080	TR,KTC3198GR	AB
Q	358	87-026-610-080	TR,KTC3198GR	AB
Q	359	87-026-610-080	TR,KTC3198GR	AB
Q	356	87-A30-076-080	C-TR,2SC3052F	
Q	354	87-A30-087-080	C-FET,2SK2158	AB
Q	351	87-A30-087-080	C-FET,2SK2158	AB
Q	353	87-A30-087-080	C-FET,2SK2158	AB
Q	355	87-A30-105-080	C-TR,RT1P 441C	AB
Q	383	87-A30-075-080	C-TR,2SA1235F	AB
Q	381	87-A30-076-080	C-TR,2SC3052F	AB
Q	382	87-A30-076-080	C-TR,2SC3052F	AB
SFR	305	87-A90-433-080	SFR,50K H NVZ6TLTA	
SFR	306	87-A90-433-080	SFR,50K H NVZ6TLTA	
SFR	302	87-A90-557-080	SFR,33K H HOKU	
SFR	304	87-A90-557-080	SFR,33K H HOKU	

ELECTRICAL MAIN PARTS LIST - 5/9

SFR	303	87-A90-557-080	SFR,33K H HOKU	.....
SFR	301	87-A90-557-080	SFR,33K H HOKU	.....
SFR	351	87-A90-433-080	SFR,50K H NVZ6TLTA	AB.....
SFR	352	87-A90-433-080	SFR,50K H NVZ6TLTA	AB.....
C	407	87-010-188-080	CAP,CHIP 6800P	AB.....
C	408	87-010-188-080	CAP,CHIP 6800P	AB.....
C	401	87-010-196-080	CHIP CAPACITOR,0.1-25	AB.....
C	402	87-010-260-080	CAP, ELECT 47-25V	AB.....
C	404	87-010-404-080	CAP, ELECT 4.7-50V	AB.....
C	406	87-010-404-080	CAP, ELECT 4.7-50V	AB.....
C	405	87-010-404-080	CAP, ELECT 4.7-50V	AB.....
C	403	87-010-404-080	CAP, ELECT 4.7-50V	AB.....
C	409	87-012-140-080	CAP 470P	AB.....
C	415	87-010-197-080	CAP, CHIP 0.01 DM	AB.....
C	416	87-010-197-080	CAP, CHIP 0.01 DM	AB.....
C	419	87-010-260-080	CAP, ELECT 47-25V	AB.....
C	412	87-010-404-080	CAP, ELECT 4.7-50V	AB.....
C	414	87-010-404-080	CAP, ELECT 4.7-50V	AB.....
C	411	87-010-404-080	CAP, ELECT 4.7-50V	AB.....
C	413	87-010-404-080	CAP, ELECT 4.7-50V	AB.....
C	417	87-010-956-080	CHIP-CAP,S 0.068-25B	AB.....
C	418	87-010-956-080	CHIP-CAP,S 0.068-25B	AB.....
C	410	87-012-140-080	CAP 470P	AB.....
D	402	87-020-465-080	DIODE,1SS133 (110MA)	AB.....
D	401	87-A40-269-080	C-DIODE,MC2836	AB.....
IC	401	87-A21-022-040	C-IC,BA3880FS	AB.....
C	457	87-010-196-080	CHIP CAPACITOR,0.1-25	AB.....
C	458	87-010-196-080	CHIP CAPACITOR,0.1-25	AB.....
C	452	87-010-401-080	CAP, ELECT 1-50V	AB.....
C	451	87-010-401-080	CAP, ELECT 1-50V	AB.....
C	454	87-010-545-080	CAP, ELECT 0.22-50V	A.....
C	453	87-010-545-080	CAP, ELECT 0.22-50V	A.....
C	455	87-010-546-080	CAP, ELECT 0.33-50V	A.....
C	456	87-010-546-080	CAP, ELECT 0.33-50V	A.....
C	459	87-A10-301-080	CAP,M 0.033-50 J	A.....
C	455	87-A10-305-080	CAP,M 0.068-50 J	.B.....
C	456	87-A10-305-080	CAP,M 0.068-50 J	.B.....
C	453	87-A11-012-080	CAP,M 0.15-50 J DE	.B.....
C	454	87-A11-012-080	CAP,M 0.15-50 J DE	.B.....
C	465	87-A10-298-080	CAP,M 0.018-50 J	.B.....
C	466	87-A10-298-080	CAP,M 0.018-50 J	.B.....
C	460	87-A10-300-080	CAP,M 0.027-50 J	.B.....
C	460	87-A10-301-080	CAP,M 0.033-50 J	A.....
C	466	87-A10-303-080	CAP,M 0.047-50 J	A.....
C	465	87-A10-303-080	CAP,M 0.047-50 J	A.....
C	4569	87-A10-300-080	CAP,M 0.027-50 J	.B.....
IC	451	87-A21-031-040	C-IC,BU4551BF	AB.....
		87-067-579-010	TAPPING SCREW, BVT2+3-8	AB.....
C	4	87-012-368-080	C-CAP,S 0.1-50 F	AB.....
C	6	87-012-368-080	C-CAP,S 0.1-50 F	AB.....
C	5	87-012-368-080	C-CAP,S 0.1-50 F	AB.....
C	3	87-012-368-080	C-CAP,S 0.1-50 F	AB.....
C	2	87-012-369-080	C-CAP,S 0.047-50F	AB.....
C	1	87-012-369-080	C-CAP,S 0.047-50F	AB.....
C	9	87-016-658-090	CAP,E 4700-35 SMG	AB.....
C	10	87-016-658-090	CAP,E 4700-35 SMG	AB.....
C	29	87-010-247-080	CAP, ELECT 100-50V	AB.....
C	26	87-010-263-080	CAP, ELECT 100-10V	AB.....
C	28	87-010-263-080	CAP, ELECT 100-10V	.B.....
C	21	87-010-385-080	CAP, ELECT 220-25V	AB.....
C	22	87-010-385-080	CAP, ELECT 220-25V	AB.....
C	23	87-010-385-080	CAP, ELECT 220-25V	AB.....
C	24	87-010-385-080	CAP, ELECT 220-25V	AB.....
C	25	87-010-430-080	CAP, ELECT 100-63	AB.....
C	27	87-012-140-080	CAP 470P	AB.....
C	30	87-010-112-080	CAP, ELECT 100-16V	AB.....
C	31	87-010-235-080	CAP,E 470-16 SME	AB.....
C	61	87-010-260-080	CAP, ELECT 47-25V	AB.....
C	62	87-010-496-080	CAP,E 3.3-50 5L	AB.....
C	92	87-010-263-080	CAP, ELECT 100-10V	AB.....
C	93	87-010-380-080	CAP, ELECT 47-16V	AB.....
C	91	87-010-401-080	CAP, ELECT 1-50V	AB.....
CN	1	87-A60-739-010	CONN,13P JL-BT	AB.....
CN	91	87-A60-109-010	CONN,2P V S2M-2W	AB.....
CNA	1	8Z-NF8-669-010	CONN ASSY,9P VH	AB.....
D	9	87-020-465-080	DIODE,1SS133 (110MA)	AB.....
D	8	87-020-465-080	DIODE,1SS133 (110MA)	AB.....
D	6	87-070-274-080	DIODE,1N4003 SEM	AB.....
D	5	87-070-274-080	DIODE,1N4003 SEM	AB.....
D	4	87-070-274-080	DIODE,1N4003 SEM	AB.....
D	3	87-070-274-080	DIODE,1N4003 SEM	AB.....
D	7	87-A40-341-080	ZENER,MTZJ 36 A	AB.....
D	1	87-A40-549-090	DIODE,RBA-1002	AB.....
D	10	87-A40-345-080	ZENER,MTZJ10C	AB.....
D	64	87-070-274-080	DIODE,1N4003 SEM	AB.....
D	63	87-A40-004-080	ZENER,MTZJ16A	AB.....
D	62	87-A40-269-080	C-DIODE,MC2836	AB.....
D	61	87-A40-270-080	C-DIODE,MC2838	AB.....
D	91	87-020-465-080	DIODE,1SS133 (110MA)	AB.....
D	92	87-020-465-080	DIODE,1SS133 (110MA)	AB.....
Q	2	87-026-609-080	TR,KTA1266GR	AB.....
Q	1	87-026-609-080	TR,KTA1266GR	AB.....

ELECTRICAL MAIN PARTS LIST - 6/9

Q	5	87-026-610-080	TR,KTC3198GR	AB
Q	8	87-A30-075-080	C-TR,2SA1235F	AB
Q	7	87-A30-075-080	C-TR,2SA1235F	.B
Q	6	87-A30-076-080	C-TR,2SC3052F	AB
Q	9	87-A30-234-080	TR,CSC4115BC	AB
Q	66	87-A30-075-080	C-TR,2SA1235F	AB
Q	64	87-A30-075-080	C-TR,2SA1235F	AB
Q	65	87-A30-076-080	C-TR,2SC3052F	AB
Q	63	87-A30-076-080	C-TR,2SC3052F	AB
Q	67	87-A30-076-080	C-TR,2SC3052F	AB
Q	92	87-026-609-080	TR,KTA1266GR	AB
Q	91	87-A30-076-080	C-TR,2SC3052F	AB
R	20	87-A00-261-080	RES,M/F 0.56-1W J	.B
WH	1	87-A90-510-010	HLDR,WIRE 2.5-9P	AB
C	101	87-010-178-080	CHIP CAP 1000P	AB
C	102	87-010-178-080	CHIP CAP 1000P	AB
C	124	87-010-176-080	C-CAP,S 680P-50 SL	
C	123	87-010-176-080	C-CAP,S 680P-50 SL	
C	129	87-010-191-080	C-CAP,S 0.015-50 F	
C	126	87-012-368-080	C-CAP,S 0.1-50 F	AB
C	127	87-012-368-080	C-CAP,S 0.1-50 F	AB
C	128	87-012-368-080	C-CAP,S 0.1-50 F	AB
C	125	87-012-368-080	C-CAP,S 0.1-50 F	AB
C	130	87-010-191-080	C-CAP,S 0.015-50 F	
L	101	87-003-383-010	COIL,1UH-S	AB
L	102	87-003-383-010	COIL,1UH-S	AB
Q	101	87-A30-257-080	C-TR,2SD1306E	AB
Q	102	87-A30-257-080	C-TR,2SD1306E	AB
Q	127	87-A30-075-080	C-TR,2SA1235F	AB
R	146	87-A00-441-050	RES,270-1/2W J RP	.B
R	145	87-A00-441-050	RES,270-1/2W J RP	.B
R	144	87-A00-441-050	RES,270-1/2W J RP	.B
R	143	87-A00-441-050	RES,270-1/2W J RP	.B
R	144	87-A00-442-050	RES,330-1/2W J RP	A
R	145	87-A00-442-050	RES,330-1/2W J RP	A
R	143	87-A00-442-050	RES,330-1/2W J RP	A
R	146	87-A00-442-050	RES,330-1/2W J RP	A
C	203	87-010-177-080	C-CAP,S 820P-50 SL	A
C	204	87-010-177-080	C-CAP,S 820P-50 SL	A
C	209	87-010-403-080	CAP, ELECT 3.3-50V	AB
C	204	87-012-140-080	CAP 470P	.B
C	203	87-012-140-080	CAP 470P	.B
C	210	87-010-403-080	CAP, ELECT 3.3-50V	AB
C	229	87-010-993-080	C-CAP,S 0.056-25 B	AB
C	234	87-010-190-080	S CHIP F 0.01	
C	233	87-010-190-080	S CHIP F 0.01	
C	232	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	231	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	237	87-010-322-080	C-CAP,S 100P-50 CH	
C	238	87-010-322-080	C-CAP,S 100P-50 CH	
C	230	87-010-993-080	C-CAP,S 0.056-25 B	AB
C	235	87-016-285-080	CAP,E 47-100SME	AB
C	236	87-016-285-080	CAP,E 47-100SME	AB
C	256	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	254	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
CN	201	87-A60-739-010	CONN,13P JL-BT	AB
D	212	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	213	87-020-465-080	DIODE,1SS133 (110MA)	AB
J	203	87-033-240-010	TERMINAL,SP 4P32SV1-05	AB
J	201	87-A60-483-010	JACK,DIA6.3 BLK ST W/S KM	AB
J	204	87-A60-750-010	JACK,PIN 4P R/W BLUE	AB
L	202	87-003-383-010	COIL,1UH-S	AB
L	201	87-003-383-010	COIL,1UH-S	AB
Q	202	87-A30-257-080	C-TR,2SD1306E	AB
Q	201	87-A30-257-080	C-TR,2SD1306E	AB
Q	221	87-A30-073-080	C-TR,RT1N 141C	AB
RY	201	87-045-382-010	RELAY,OUAZ-SH-112L	AB
C	601	87-010-183-080	C-CAP,S 2700P-50 B	AB
C	602	87-010-183-080	C-CAP,S 2700P-50 B	AB
C	619	87-010-185-080	C-CAP,S 3900P-50 B	AB
C	611	87-010-197-080	CAP, CHIP 0.01 DM	AB
C	612	87-010-322-080	C-CAP,S 100P-50 CH	AB
C	613	87-016-081-080	C-CAP,S 0.1-16 RK	AB
C	614	87-016-081-080	C-CAP,S 0.1-16 RK	AB
C	620	87-010-185-080	C-CAP,S 3900P-50 B	AB
C	627	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	628	87-010-322-080	C-CAP,S 100P-50 CH	AB
C	622	87-010-401-080	CAP, ELECT 1-50V	AB
C	621	87-010-401-080	CAP, ELECT 1-50V	AB
C	625	87-010-401-080	CAP, ELECT 1-50V	AB
C	626	87-010-401-080	CAP, ELECT 1-50V	AB
C	629	87-010-405-080	CAP, ELECT 10-50V	AB
C	624	87-A10-773-080	CAP,M 0.10-50 J	AB
C	623	87-A10-773-080	CAP,M 0.10-50 J	AB
C	637	87-010-183-080	C-CAP,S 2700P-50 B	AB
C	634	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	635	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	630	87-010-213-080	C-CAP,S 0.015-50 B	AB
C	632	87-010-263-080	CAP, ELECT 100-10V	AB
C	633	87-010-263-080	CAP, ELECT 100-10V	AB
C	636	87-010-992-080	C-CAP,S 0.047-25 B	AB
C	631	87-010-992-080	C-CAP,S 0.047-25 B	AB

C	641	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	640	87-010-314-080	C-CAP,S 22P-50V	AB
C	669	87-010-322-080	C-CAP,S 100P-50 CH	
C	672	87-010-322-080	C-CAP,S 100P-50 CH	
C	671	87-010-322-080	C-CAP,S 100P-50 CH	
C	670	87-010-322-080	C-CAP,S 100P-50 CH	
CN	604	87-099-570-010	CONN,13P TUC-P13P-B1	AB
CN	601	87-099-719-010	CONN,30P TYK-B(X)	AB
CN	602	87-A60-131-010	CONN,6P V FE	AB
CN	605	87-A60-189-010	CONN,16P V TUC-P16P-B1	
D	601	87-A40-002-080	ZENER,MTZJ5.1C	AB
D	603	87-A40-234-080	ZENER,MTZJ5.6A	AB
D	602	87-A40-438-080	ZENER,MTZJ4.7A	AB
IC	601	87-A21-202-040	C-IC,M62445AFP	AB
J	601	87-A60-402-010	JACK,PIN 6P R/W HSP-246V30	AB
Q	604	87-026-444-080	C-TR,DTA123EK	AB
Q	601	87-026-609-080	TR,KTA1266GR	AB
Q	603	87-A30-087-080	C-FET,2SK2158	
Q	602	87-A30-269-040	C-FET,2SJ461-T1	
C	707	87-010-180-080	C-CER 1500P	AB
C	702	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	706	87-010-197-080	CAP, CHIP 0.01 DM	AB
C	708	87-010-213-080	C-CAP,S 0.015-50 B	AB
C	709	87-010-213-080	C-CAP,S 0.015-50 B	AB
C	701	87-010-263-080	CAP, ELECT 100-10V	AB
C	704	87-010-319-080	C-CAP,S 56P-50 CH	AB
C	703	87-010-319-080	C-CAP,S 56P-50 CH	AB
C	705	87-012-393-080	C-CAP,S 0.22-16 R K	AB
C	711	87-010-181-080	CAP,CHIP S 1800P	AB
C	718	87-010-183-080	C-CAP,S 2700P-50 B	AB
C	717	87-010-183-080	C-CAP,S 2700P-50 B	AB
C	712	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	710	87-010-197-080	CAP, CHIP 0.01 DM	AB
C	714	87-010-374-080	CAP, ELECT 47-10V	AB
C	716	87-010-494-080	CAP ELECT GAS 1/50	AB
C	715	87-010-494-080	CAP ELECT GAS 1/50	AB
C	713	87-010-544-080	CAP, ELECT 0.1-50V	AB
C	735	87-010-178-080	CHIP CAP 1000P	AB
C	736	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	732	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	733	87-010-196-080	CHIP CAPACITOR,0.1-25	AB
C	738	87-010-318-080	C-CAP,S 47P-50 CH	AB
C	731	87-010-560-080	CAP,E 10-50 GAS	AB
C	734	87-012-156-080	C-CAP,S 220P-50 CH	AB
D	701	87-017-931-080	ZENER,MTZJ5.6B	AB
IC	701	87-A20-613-040	C-IC,BU9262AFS	AB
L	701	87-005-448-080	COIL 220UH,K	AB
Q	732	87-A30-075-080	C-TR,2SA1235F	AB
Q	731	87-A30-076-080	C-TR,2SC3052F	AB
C	209	87-010-322-080	C-CAP,S 100P-50 CH	AB
C	203	87-010-405-080	CAP, ELECT 10-50V	.B
C	204	87-010-405-080	CAP, ELECT 10-50V	.B
C	203	87-010-408-080	CAP, ELECT 47-50V	A.
C	207	87-010-408-080	CAP, ELECT 47-50V	AB
C	208	87-010-408-080	CAP, ELECT 47-50V	AB
C	204	87-010-408-080	CAP, ELECT 47-50V	A.
C	212	87-010-260-080	CAP, ELECT 47-25V	AB
C	211	87-010-260-080	CAP, ELECT 47-25V	AB
C	210	87-010-322-080	C-CAP,S 100P-50 CH	AB
C	219	87-012-368-080	C-CAP,S 0.1-50 F	AB
C	213	87-A10-812-080	C-CAP,S 220P-200 J CH	AB
C	214	87-A10-812-080	C-CAP,S 220P-200 J CH	AB
C	221	87-010-178-080	CHIP CAP 1000P	AB
C	222	87-010-178-080	CHIP CAP 1000P	AB
C	220	87-012-368-080	C-CAP,S 0.1-50 F	AB
C	299	87-010-197-080	CAP, CHIP 0.01 DM	AB
C	305	87-010-185-080	C-CAP,S 3900P-50 B	AB
C	306	87-010-185-080	C-CAP,S 3900P-50 B	AB
C	309	87-010-322-080	C-CAP,S 100P-50 CH	AB
C	307	87-010-403-080	CAP, ELECT 3.3-50V	AB
C	304	87-010-403-080	CAP, ELECT 3.3-50V	AB
C	308	87-010-403-080	CAP, ELECT 3.3-50V	AB
C	303	87-010-403-080	CAP, ELECT 3.3-50V	AB
C	313	87-010-260-080	CAP, ELECT 47-25V	AB
C	314	87-010-260-080	CAP, ELECT 47-25V	AB
C	310	87-010-322-080	C-CAP,S 100P-50 CH	AB
C	319	87-012-368-080	C-CAP,S 0.1-50 F	AB
C	312	87-A10-946-080	C-CAP,S 220P-100 J CH	AB
C	311	87-A10-946-080	C-CAP,S 220P-100 J CH	AB
C	322	87-010-186-080	CAP,CHIP 4700P	AB
C	321	87-010-186-080	CAP,CHIP 4700P	AB
C	320	87-012-368-080	C-CAP,S 0.1-50 F	AB
C	502	87-012-368-080	C-CAP,S 0.1-50 F	AB
C	501	87-016-299-080	CAP,E 10-100 SME	AB
C	503	87-016-299-080	CAP,E 10-100 SME	AB
CN	102	87-A60-727-010	CONN,13P JL-R	AB
CN	101	87-A60-727-010	CONN,13P JL-R	AB
D	205	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	206	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	201	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	202	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	209	87-020-465-080	DIODE,1SS133 (110MA)	AB

D	208	87-A40-488-080	DIODE,1SS244	AB
D	207	87-A40-488-080	DIODE,1SS244	AB
D	212	87-020-331-080	CHIP-DIODE,DAN202K	AB
D	210	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	296	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	298	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	297	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	295	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	299	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	306	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	302	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	305	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	301	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	309	87-A40-488-080	DIODE,1SS244	AB
D	312	87-020-331-080	CHIP-DIODE,DAN202K	AB
D	310	87-A40-488-080	DIODE,1SS244	AB
D	501	87-070-136-080	ZENER,MTZJ5.1B	AB
D	502	87-070-136-080	ZENER,MTZJ5.1B	AB
D	506	87-A40-183-090	DIODE,RK36(F)	AB
D	505	87-A40-183-090	DIODE,RK36(F)	AB
D	503	87-A40-345-080	ZENER,MTZJ10C	AB
D	509	87-A40-345-080	ZENER,MTZJ10C	AB
D	510	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	511	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	512	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	513	87-020-465-080	DIODE,1SS133 (110MA)	AB
D	514	87-020-465-080	DIODE,1SS133 (110MA)	AB
Q	101	89-213-702-010	TR,2SB1370 (1.8W)	AB
Q	102	89-213-702-010	TR,2SB1370 (1.8W)	AB
Q	206	87-A30-076-080	C-TR,2SC3052F	AB
Q	204	87-A30-076-080	C-TR,2SC3052F	AB
Q	203	87-A30-076-080	C-TR,2SC3052F	AB
Q	205	87-A30-076-080	C-TR,2SC3052F	AB
Q	209	87-A30-190-080	TR,CC5551	AB
Q	208	87-A30-268-040	C-TR,2SA1514K(S)	AB
Q	202	87-A30-268-040	C-TR,2SA1514K(S)	AB
Q	201	87-A30-268-040	C-TR,2SA1514K(S)	AB
Q	207	87-A30-268-040	C-TR,2SA1514K(S)	AB
Q	219	87-A30-097-010	TR,FN 1016	A
Q	214	87-A30-098-010	TR,FP 1016	A
Q	213	87-A30-098-010	TR,FP 1016	A
Q	219	87-A30-137-010	TR,2SD2494	.B
Q	213	87-A30-138-010	TR,2SB1625	.B
Q	214	87-A30-138-010	TR,2SB1625	.B
Q	210	87-A30-190-080	TR,CC5551	AB
Q	223	87-A30-076-080	C-TR,2SC3052F	AB
Q	226	87-A30-076-080	C-TR,2SC3052F	AB
Q	225	87-A30-076-080	C-TR,2SC3052F	AB
Q	224	87-A30-076-080	C-TR,2SC3052F	AB
Q	220	87-A30-097-010	TR,FN 1016	A
Q	222	87-A30-106-070	C-TR,CMBT5551	AB
Q	221	87-A30-106-070	C-TR,CMBT5551	AB
Q	220	87-A30-137-010	TR,2SD2494	.B
Q	298	87-A30-268-040	C-TR,2SA1514K(S)	AB
Q	301	87-A30-075-080	C-TR,2SA1235F	AB
Q	302	87-A30-075-080	C-TR,2SA1235F	AB
Q	308	87-A30-075-080	C-TR,2SA1235F	AB
Q	307	87-A30-075-080	C-TR,2SA1235F	AB
Q	306	87-A30-076-080	C-TR,2SC3052F	AB
Q	305	87-A30-076-080	C-TR,2SC3052F	AB
Q	304	87-A30-076-080	C-TR,2SC3052F	AB
Q	303	87-A30-076-080	C-TR,2SC3052F	AB
Q	317	87-A30-119-080	C-TR,2SC3906K R	AB
Q	318	87-A30-119-080	C-TR,2SC3906K R	AB
Q	312	87-A30-190-080	TR,CC5551	AB
Q	311	87-A30-190-080	TR,CC5551	AB
Q	313	87-A30-255-010	TR,2SB1342	AB
Q	314	87-A30-255-010	TR,2SB1342	AB
Q	316	87-A30-256-010	TR,2SD1933	AB
Q	315	87-A30-256-010	TR,2SD1933	AB
Q	326	87-A30-076-080	C-TR,2SC3052F	AB
Q	324	87-A30-076-080	C-TR,2SC3052F	AB
Q	325	87-A30-076-080	C-TR,2SC3052F	AB
Q	323	87-A30-076-080	C-TR,2SC3052F	AB
Q	503	87-A30-072-080	C-TR,RT1P 144C	AB
Q	506	87-A30-074-080	C-TR,RT1P 141C	AB
Q	505	87-A30-075-080	C-TR,2SA1235F	AB
Q	504	87-A30-076-080	C-TR,2SC3052F	AB
Q	501	87-A30-162-010	FET,2SK2937	AB
Q	502	87-A30-162-010	FET,2SK2937	AB
Q	507	87-A30-268-040	C-TR,2SA1514K(S)	AB
R	226	87-A00-262-080	RES,M/F 0.15-2W J	AB
R	225	87-A00-262-080	RES,M/F 0.15-2W J	AB
R	228	87-A00-262-080	RES,M/F 0.15-2W J	AB
R	227	87-A00-262-080	RES,M/F 0.15-2W J	AB
R	239	87-A00-262-080	RES,M/F 0.15-2W J	AB
R	242	87-A00-262-080	RES,M/F 0.15-2W J	AB
R	326	87-A00-258-080	RES,M/F 0.22-1W J	AB
R	325	87-A00-258-080	RES,M/F 0.22-1W J	AB
R	328	87-A00-258-080	RES,M/F 0.22-1W J	AB
R	327	87-A00-258-080	RES,M/F 0.22-1W J	AB
R	339	87-A00-258-080	RES,M/F 0.22-1W J	AB

R	340	87-A00-258-080	RES,M/F 0.22-1W J	AB.....
TH	201	87-A91-042-080	C-THMS,100K 55001	AB.....
TH	202	87-A91-042-080	C-THMS,100K 55001	AB.....

ELECTRICAL MAIN PARTS LIST - 1/3 (TUNER: ZZA-1)

NOTE: The characters in the suffix column indicate the part usage.

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
URTM		XX		C
C 701	87-010-381-080	0E	CAP, ELECT 330-16V	ABC
C 702	87-010-404-080	0E	CAP, ELECT 4.7-50V	ABC
C 704	87-012-286-080	0E	CAP, U 0.01-25	ABC
C 703	87-012-286-080	0E	CAP, U 0.01-25	ABC
C 711	87-010-260-080	0E	CAP, ELECT 47-25V	ABC
C 711	87-010-553-080	0E	CAP,E 47-16	
C 712	87-010-831-080	0E	C-CAP,U,0.1-16F	ABC
C 718	87-012-179-080	0E	C-CAP,U 20P-50 CH	.BC
C 714	87-012-286-080	0E	CAP, U 0.01-25	ABC
C 717	87-012-286-080	0E	CAP, U 0.01-25	ABC
C 719	87-012-286-080	0E	CAP, U 0.01-25	ABC
C 727	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	ABC
C 728	87-010-248-080	0E	CAP, ELECT 220-10V	ABC
C 721	87-012-176-080	0E	CAP 15P	ABC
C 722	87-012-176-080	0E	CAP 15P	ABC
C 720	87-012-195-080	0E	C-CAP,U 100P-50CH	ABC
C 729	87-012-274-080	0E	CHIP CAP,U 1000P-50B	ABC
C 725	87-018-131-080	0E	CAP, CER 1000P-50V	
CN 701	87-A60-650-010	1A	CONN,16P H GRY TUC-P16X-C1	
CN 701	87-A60-700-010	0E	CONN,13P H GRY TUC-P13X-C1	ABC
D 721	87-017-149-080	0E	ZENER,HZS6A2L	.BC
D 722	87-020-465-080	0E	DIODE,1SS133 (110MA)	
D 721	87-A40-234-080	0E	ZENER,MTZJ5.6A	A
IC 721	87-070-127-110	1C	IC,LC72131 D	ABC
Q 713	87-A30-072-080	0E	C-TR,RT1P 144C	
Q 712	87-A30-072-080	0E	C-TR,RT1P 144C	
Q 711	87-A30-196-080	0E	TR,2SC4115SRS	A
Q 711	87-A30-234-080	0E	TR,CSC4115BC	.BC
X 721	87-A70-061-010	1A	VIB,XTAL 4.500MHZ CSA-309	ABC
C 872	87-010-400-080	0E	CAP, ELECT 0.47-50V	AB
C 873	87-010-404-080	0E	CAP, ELECT 4.7-50V	AB
C 877	87-012-278-080	0E	C-CAP,U 2200P-50 B	AB
C 878	87-012-278-080	0E	C-CAP,U 2200P-50 B	AB
C 889	87-010-248-080	0E	CAP, ELECT 220-10V	AB
C 884	87-010-260-080	0E	CAP, ELECT 47-25V	AB
C 883	87-010-404-080	0E	CAP, ELECT 4.7-50V	AB
C 885	87-010-545-080	0E	CAP, ELECT 0.22-50V	A
C 886	87-010-545-080	0E	CAP, ELECT 0.22-50V	A
C 888	87-010-787-080	0E	CAP, U 0.022-25	AB
C 881	87-012-141-080	0E	CHIP-CAPACITOR,0.22-16F	AB
C 882	87-012-172-080	0E	CAPACITOR CHIP U 10P CH	AB
C 887	87-012-286-080	0E	CAP, U 0.01-25	AB
C 885	87-016-460-080	0E	C-CAP,S 0.22-16 B	.B
C 886	87-016-460-080	0E	C-CAP,S 0.22-16 B	.B
IC 871	87-070-060-040	1F	IC,TA2040AF	AB
Q 873	87-026-226-080	0E	CHIP-TR,DTA143EK	AB
X 891	87-030-394-010	1B	VIB,CER CSA3.6MGF228	AB
C 705	87-010-213-080	0E	C-CAP,S 0.015-50 B	
C 706	87-010-213-080	0E	C-CAP,S 0.015-50 B	
C 705	87-A10-592-080	0E	C-CAP,S 0.015-50 J B	.BC
C 706	87-A10-592-080	0E	C-CAP,S 0.015-50 J B	.BC
C 733	87-010-180-080	0E	C-CER 1500P	
C 738	87-010-180-080	0E	C-CER 1500P	
C 737	87-010-180-080	0E	C-CER 1500P	
C 734	87-010-180-080	0E	C-CER 1500P	
C 735	87-010-213-080	0E	C-CAP,S 0.015-50 B	
C 736	87-010-213-080	0E	C-CAP,S 0.015-50 B	
C 736	87-010-987-080	0E	C-CAP,S 1500P-50 CH	.BC
C 733	87-010-987-080	0E	C-CAP,S 1500P-50 CH	.BC
C 735	87-010-987-080	0E	C-CAP,S 1500P-50 CH	.BC
C 734	87-010-987-080	0E	C-CAP,S 1500P-50 CH	.BC
C 734	87-012-280-080	0E	CAP, U 3300P-50	
C 733	87-012-280-080	0E	CAP, U 3300P-50	
C 738	87-A10-592-080	0E	C-CAP,S 0.015-50 J B	.BC
C 737	87-A10-592-080	0E	C-CAP,S 0.015-50 J B	.BC
C 752	87-010-220-080	0E	C-CAP,S 0.018-25 B	.B
C 751	87-010-220-080	0E	C-CAP,S 0.018-25 B	.B
C 758	87-012-167-080	0E	C-CAP,U 5P-50 CH	ABC
C 757	87-012-188-080	0E	C-CAP,U 47P-50 CH	ABC
C 753	87-012-195-080	0E	C-CAP,U 100P-50CH	
C 752	87-012-282-080	0E	CAP, U 4700P-50	
C 756	87-012-286-080	0E	CAP, U 0.01-25	ABC
C 751	87-012-365-080	0E	C-CAP,S 0.027-25VBK	..C
C 752	87-012-365-080	0E	C-CAP,S 0.027-25VBK	..C
C 766	87-010-197-080	0E	CAP, CHIP 0.01 DM	
C 769	87-010-260-080	0E	CAP, ELECT 47-25V	ABC
C 768	87-012-286-080	0E	CAP, U 0.01-25	ABC
C 765	87-012-286-080	0E	CAP, U 0.01-25	ABC
C 764	87-012-337-080	0E	C-CAP,U 56P-50 CH	ABC
C 774	87-010-263-080	0E	CAP, ELECT 100-10V	ABC
C 771	87-010-383-080	0E	CAP, ELECT 33-25V	ABC
C 777	87-010-400-080	0E	CAP, ELECT 0.47-50V	ABC
C 775	87-010-404-080	0E	CAP, ELECT 4.7-50V	ABC
C 777	87-010-493-040	0E	CAP,E 0.47-50 GAS	
C 777	87-010-493-080	0E	CAP,E 0.47-50 GAS	
C 770	87-010-829-080	0E	CAP, U 0.047-16	ABC

ELECTRICAL MAIN PARTS LIST - 2/3 (TUNER: ZZA-1)

C	780	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	ABC
C	786	87-010-401-080	0E	CAP, ELECT 1-50V	ABC
C	785	87-010-401-080	0E	CAP, ELECT 1-50V	ABC
C	786	87-010-405-080	0E	CAP, ELECT 10-50V	ABC
C	785	87-010-405-080	0E	CAP, ELECT 10-50V	ABC
C	785	87-010-494-080	0E	CAP ELECT GAS 1/50	
C	786	87-010-494-080	0E	CAP ELECT GAS 1/50	
C	787	87-012-275-080	0E	C-CAP,U 1200P-50 B	ABC
C	788	87-012-275-080	0E	C-CAP,U 1200P-50 B	ABC
C	784	87-012-286-080	0E	CAP, U 0.01-25	ABC
C	796	87-010-403-080	0E	CAP, ELECT 3.3-50V	ABC
C	794	87-010-406-080	0E	CAP, ELECT 22-50	ABC
C	795	87-010-596-080	0E	CAP, S 0.047-16	..C
C	793	87-012-273-080	0E	C-CAP,U 820P-50 B	ABC
C	797	87-012-276-080	0E	CAP, CHIP SS 1500 PBK	A
C	798	87-012-276-080	0E	CAP, CHIP SS 1500 PBK	A
D	771	87-020-465-080	0E	DIODE,1SS133 (110MA)	ABC
D	773	87-A40-291-080	0E	DIODE,1N4148 (CPT)	
IC	771	87-A20-913-010	1D	IC,LA1837NL	ABC
L	771	87-A50-266-010	1A	COIL,FM DET-2N(TOK)	ABC
L	772	87-A90-052-010	1C	FLTR,CFMT-450A(TOK)	
L	772	87-A90-053-010	1C	FLTR,PCFMT-060(TOK)	AB
L	772	87-A90-733-010	1A	FLTR,PCFAZH-450 (TOK)	
L	772	87-A91-110-010		FLTR,PCFJZH-450 (TOK)	..C
L	781	87-005-847-080	0E	COIL,2.2UH(CECS)	
L	792	87-A50-027-010	1A	COIL,1 POLE MPX(TOK)	
L	791	87-A50-027-010	1A	COIL,1 POLE MPX(TOK)	
X	771	87-030-354-010	1A	VIB,CF BFU 450C	
C	859	87-012-286-080	0E	CAP, U 0.01-25	
C	865	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	
C	866	87-010-405-080	0E	CAP, ELECT 10-50V	
C	864	87-010-405-080	0E	CAP, ELECT 10-50V	
C	869	87-012-180-080	0E	C-CAP,U 22P-50 CH	
C	868	87-012-184-080	0E	C-CAP,U 33P-50 CH	
C	862	87-012-199-080	0E	CAP 220P	
C	861	87-012-199-080	0E	CAP 220P	
C	863	87-012-270-080	0E	CAP, U 470P-50	
C	867	87-012-286-080	0E	CAP, U 0.01-25	
IC	851	87-A20-440-040	1H	C-IC,BU1920FS	
L	851	87-005-847-080	0E	COIL,2.2UH(CECS)	
Q	853	87-A30-076-080	0E	C-TR,2SC3052F	
X	851	87-A70-091-010	1B	VIB,XTAL 4.332MHZ CSA-309	
C	820	87-010-260-080	0E	CAP, ELECT 47-25V	ABC
C	942	87-012-172-080	0E	CAPACITOR CHIP U 10P CH	
C	941	87-012-180-080	0E	C-CAP,U 22P-50 CH	
C	947	87-012-286-080	0E	CAP, U 0.01-25	ABC
C	940	87-012-286-080	0E	CAP, U 0.01-25	ABC
C	944	87-014-049-080	0E	CAP,PP 470P-100 J	
C	944	87-014-051-080	0E	CAPACITOR (PP), 560P	
C	949	87-A10-039-080	0E	C-CAP,U 470P-50 J CH	
C	958	87-010-197-080	0E	CAP, CHIP 0.01 DM	
C	956	87-010-263-080	0E	CAP, ELECT 100-10V	
C	959	87-010-831-080	0E	C-CAP,U,0.1-16F	
C	952	87-012-286-080	0E	CAP, U 0.01-25	ABC
C	954	87-012-358-080	0E	C-CAP,S 0.47-10 F Z	
C	950	87-014-073-080	0E	CAP,PP 4700P-100 J	
C	963	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	ABC
C	962	87-010-401-080	0E	CAP, ELECT 1-50V	
C	964	87-012-170-080	0E	C-CAP,U 8P-50 CH	A
C	961	87-012-174-080	0E	CAP CHIP CERA SS 12P CHJ	.BC
C	960	87-012-350-080	0E	C-CAP,1-25 F	
CF	802	82-785-747-010	1A	CF MS2 GHY R	
CF	802	87-008-261-010	1A	FILTER, SFE10.7MA5-A	ABC
CF	801	87-008-261-010	1A	FILTER, SFE10.7MA5-A	ABC
CF	801	87-008-423-010	1A	CERAMIC FILTER, SFE10.7	
D	944	87-020-465-080	0E	DIODE,1SS133 (110MA)	
D	942	87-A40-270-080	0E	C-DIODE,MC2838	
FFE	801	A8-6ZA-190-030	0E	6ZA-1 FEUNM	
FFE	801	A8-6ZA-191-130		6ZA-1 FEENM	
FFE	801	A8-6ZA-192-030	2Y	6ZA-1 FEJNM	.B
FFE	801	A8-6ZA-199-170		6ZA-1 FEENC	
FFE	801	A8-6ZA-19A-070		6ZA-1 FEJNC	
FFE	801	A8-6ZA-19D-070	1H	6ZA-1 YFEJNC	A
FFE	801	A8-8ZA-190-030		8ZA-1 FEUNM	..C
FFE	801	A8-8ZA-192-070		8ZA-1 FEUNC	
FFE	801	A8-8ZA-193-070	1E	8ZA-1 YFEUNC	
J	801	87-033-241-010	1B	TERMINAL,ANT AJ-2039	
J	801	87-A60-702-010	1B	TERMINAL,ANT 4P CJ-9036	ABC
J	801	87-A60-703-010	1A	TERMINAL,ANT 3P CJ-9037	
J	940	81-754-629-010	0E	CONNECTOR, 2P	
L	832	87-005-847-080	0E	COIL,2.2UH(CECS)	
L	943	87-005-372-080	0E	COIL S 1MHM	
L	942	87-A50-019-010	0E	COIL,OSC LW(COI)	
L	941	87-A50-020-010	0E	COIL,ANT LW(COI)	
L	941	87-A50-022-010	0E	COIL,ANT SW(COI)	
L	944	87-A50-159-010	0E	COIL,10MH K C2B	
L	942	87-A50-173-010	0E	COIL,OSC SW-N(COI)	
L	943	87-A50-432-010		COIL,1MH K CW	
L	981	87-A50-430-010		COIL,ANT MW(3BSW)	
L	982	87-A50-431-010		COIL,OSC MW(3BSW)	
L	981	87-NF4-650-010	1D	COIL,AM PACK 4N(TOK)	A
L	981	87-NF4-651-010	1C	COIL,AM PACK2N(TOM)	

ELECTRICAL MAIN PARTS LIST - 3/3 (TUNER: ZZA-1)

L	981	88-NF8-625-110	1D	COIL,AM PACK3N(TOK)	.....
L	981	8Z-ZA1-664-010		COIL,AM PACK 4(TOK)	.BC....
L	981	8Z-ZA1-665-010		COIL,AM PACK 2(TOK)	.....
Q	712	87-A30-072-080	0E	C-TR,RT1P 144C	ABC....
Q	805	89-327-143-080	0E	TR,2SC2714 (0.1W)	ABC....
Q	943	87-A30-075-080	0E	C-TR,2SA1235F	.....
Q	942	87-A30-075-080	0E	C-TR,2SA1235F	.....
Q	949	87-A30-076-080	0E	C-TR,2SC3052F	.....
Q	945	87-A30-076-080	0E	C-TR,2SC3052F	.....
Q	944	87-A30-076-080	0E	C-TR,2SC3052F	.....
Q	948	87-A30-086-070	0E	C-TR,CSD1306E	.....
Q	947	89-503-602-080	1A	C-FET,2SK360E	.....
Q	947	89-505-434-540	0E	C-FET,2SK543(4/5)	.....
Q	951	87-A30-074-080	0E	C-TR,RT1P 141C	.....
SCR	981	87-A40-618-080		VARI-CAP,SVC 348(S/T)	.....
TC	942	87-011-164-010	0E	CAPACITOR,TRIMMER 30P	.....
TC	941	87-011-173-010	1A	CERAMIC TRIMMER 20P	.....
TC	941	87-011-220-080	1A	TRIMMER CAP 20P VTC	.....
TC	943	87-011-221-080	1A	CAP, TRIMMER 30P	.....

MECHANICAL PARTS LIST - 1/2

NOTE: The characters in the suffix column indicate the part usage.

LH		XX		A
U		XX		B
REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
	8Z-NF5-004-010		CABI,STEEL	AB
	8Z-NF6-001-010		CABI,FR U	AB
	8Z-NF6-002-010		CABI,FR EZ	
	8Z-NF6-003-010		BOX,CASS 1 U	AB
	8Z-NF6-004-010		BOX,CASS 2 U	AB
	8Z-NF6-005-010		PANEL,TRAY U	AB
	8Z-NF6-006-010		WINDOW,DISP U	.B
	8Z-NF6-007-010		PANEL,FR U	AB
	8Z-NF6-008-010		PANEL,FUN	AB
	8Z-NF6-009-010		PANEL,FR EZ	
	8Z-NF6-010-010		PANEL,JOG	AB
	8Z-NF6-011-010		RING,VOL	AB
	8Z-NF6-012-010		PANEL,CASS 1 U	AB
	8Z-NF6-013-010		PANEL,CASS 2 U	AB
	8Z-NF6-014-010		WINDOW,CASS 1	AB
	8Z-NF6-015-010		WINDOW,CASS 2	AB
	8Z-NF6-016-010		PANEL,CD U	AB
	8Z-NF6-017-010		PANEL,CD EZ	
	8Z-NF6-027-010		WINDOW,DISP H	A
	8Z-NF6-028-010		WINDOW,DISP EZ	
	8Z-NF6-061-010		CABI,REAR USTM	.B
	8Z-NF6-062-010		CABI,REAR HRJSTM	
	8Z-NF6-063-010		CABI,REAR LHSTNM	A
	8Z-NF6-064-010		CABI,REAR EZSTE	
	8Z-NF6-065-010		CABI,REAR KSTE	
	8Z-NF6-069-010		CABI,REAR EZSTE898	
	8Z-NF6-071-010		CABI,RERA LHST	
	8Z-NF6-072-010		CABI,REAR EZSTM	
	8Z-NF6-018-010		KEY,POWER	AB
	8Z-NF6-019-010		KEY,BBE	AB
	8Z-NF6-021-010		KEY,ASSY OPE	AB
	8Z-NF6-024-010		KEY,ASSY FUN	AB
	8Z-NF6-030-010		KEY,REC	AB
	8Z-NF6-031-010		KEY,RDS	
	8Z-NF6-034-010		KEY,JOG	AB
	8Z-NF6-035-010		KEY,MIC	AB
	8Z-NF6-036-010		KEY,EDIT	AB
	8Z-NF6-037-010		KEY,CD	AB
	8Z-NF6-038-010		KEY,PAD	AB
	8Z-NF6-039-010		KEY,DOLBY	
	8Z-NF6-044-010		KNOB,RTRY VOL	AB
	8Z-NF6-045-010		KNOB,RTRY JOG	AB
	81-532-080-010		LABEL, CASS. COMPT	AB
	86-NF6-061-010		REFLECTOR,CASS	AB
	8Z-NF6-046-010		REFLECTOR,JOG	AB
	8Z-NF6-048-010		REFLECTOR,ECO	AB
	8Z-NF6-049-010		REFLECTOR,CD	AB
	87-NF6-616-010		CONN ASSY,8P RPB	AB
	84-ZG1-245-210		CAP,OPTICAL	AB
	82-NF5-218-010		SPR-T,EJECT 1 (SIN)	AB
	82-NF5-219-010		SPR-T,EJECT 2 (SIN)	AB
	82-NF5-229-010		PLATE,LOCK	AB
	86-NF9-224-010		SPR-C,LOCK	AB
	87-064-185-010		HLDR,WIRE	AB
	87-NF4-216-010		HLDR,LOCK 1	AB
	87-NF4-217-010		HLDR,LOCK 2	AB
	87-NF4-221-010		HLDR,CABLE	AB
	87-NF8-220-010		DMPR,150	AB
	88-NF5-208-010		HLDR,PWB-M N	AB
	8Z-NF5-214-010		HLDR,HT F	AB
	8Z-NF5-215-010		HLDR,HT R	AB
	8Z-NF5-219-010		HLDR,FAN	AB
	8Z-NF6-201-010		GUIDE,CD	AB
	87-067-641-010		UTT2+3-8(W/O SLOT)BL	AB
	87-067-688-010		BVTT+3-6	AB
	87-067-703-010		TAPPING SCREW, BVT2+3-10	AB
	87-067-758-010		BVT2+3-12 W/O SLOT	AB
	87-078-191-010		S-SCREW,IT+4-10	AB
	87-591-094-410		TAPPING SCREW, QIT+3-6	AB
	87-591-095-410		TAPPING SCREW, QIT+3-8 (GLD)	AB
	87-721-097-410		QT2+3-12 GLD	AB
	87-723-096-410		QT2+3-10W/O SLOT BL	AB
	87-NF4-224-010		S-SCREW,IT3B+3-8 CU	AB
	87-085-185-010		BUSHING, AC CORD (E)	AB
	87-099-811-010		PLUG,ADPTR CONV(K)	
	87-A91-314-010		FAN,3110GL-B4W-B34-H02	AB
	88-906-301-110		FF-CABLE,6P-1.25	AB
	88-906-701-110		FF-CABLE, 6P 1.25 700MM	AB
	88-913-551-110		FF-CABLE, 13P 1.25 550MM	AB
	88-915-181-110		FF-CABLE,15P 1.25	AB
PT	101 8Z-NF6-621-010		PT,ZNF-6 U	.B
PT	101 8Z-NF6-622-010		PT,ZNF-6 LH	A
PT	101 8Z-NF6-623-010		PT,ZNF-6 HR	
PT	101 8Z-NF6-624-010		PT,ZNF-6 EZ	
W	101 87-050-079-010		AC-CORD ASSY,E	A

MECHANICAL PARTS LIST - 2/2

W	101	87-A80-110-010	AC CORD ASSY,U SPT-2W	.B.....
		8Z-NF5-207-010	HLDR,PWB PT	AB.....
		87-067-579-010	TAPPING SCREW, BVT2+3-8	AB.....
WH	1	87-A90-510-010	HLDR,WIRE 2.5-9P	AB.....

ACCESSORIES / PACKAGE LIST - 1/1

NOTE: The characters in the suffix column indicate the part usage.

LH .....XX.....A.....
U .....XX.....B.....

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
	8Z-NF6-862-010		CTN,PRINTED HRJSTM	.....
	8Z-NF6-901-010		IB,H(ECA)M	.....
	8Z-NF6-902-010		IB,LH(ESP)M	A.....
	8Z-NF6-903-010		IB,U(ESF)M	.B.....
	8Z-NF6-905-010		IB,K(E)E	.....
	8Z-NF6-906-010		IB,EZ(9L)E	.....
	8Z-NF6-916-010		IB,EZ(9L)M	.....
	87-006-225-010		AM LOOP ANT NC2	AB.....
	87-006-269-010		AM LOOP ANT (UN)	.....
	87-043-095-010		WIRE ANTENNA	.....
	87-043-106-010		WIRE, FM ANT (Z)	.....
	87-043-115-010		ANT,FEEDER FM	AB.....
	87-A91-017-010		PLUG,CONVERSION JT-0476	A.....
	8Z-NF8-701-110		RC UNIT,RC-ZAS01	AB.....

SCHEMATIC DIAGRAM – 1 (MAIN : U)

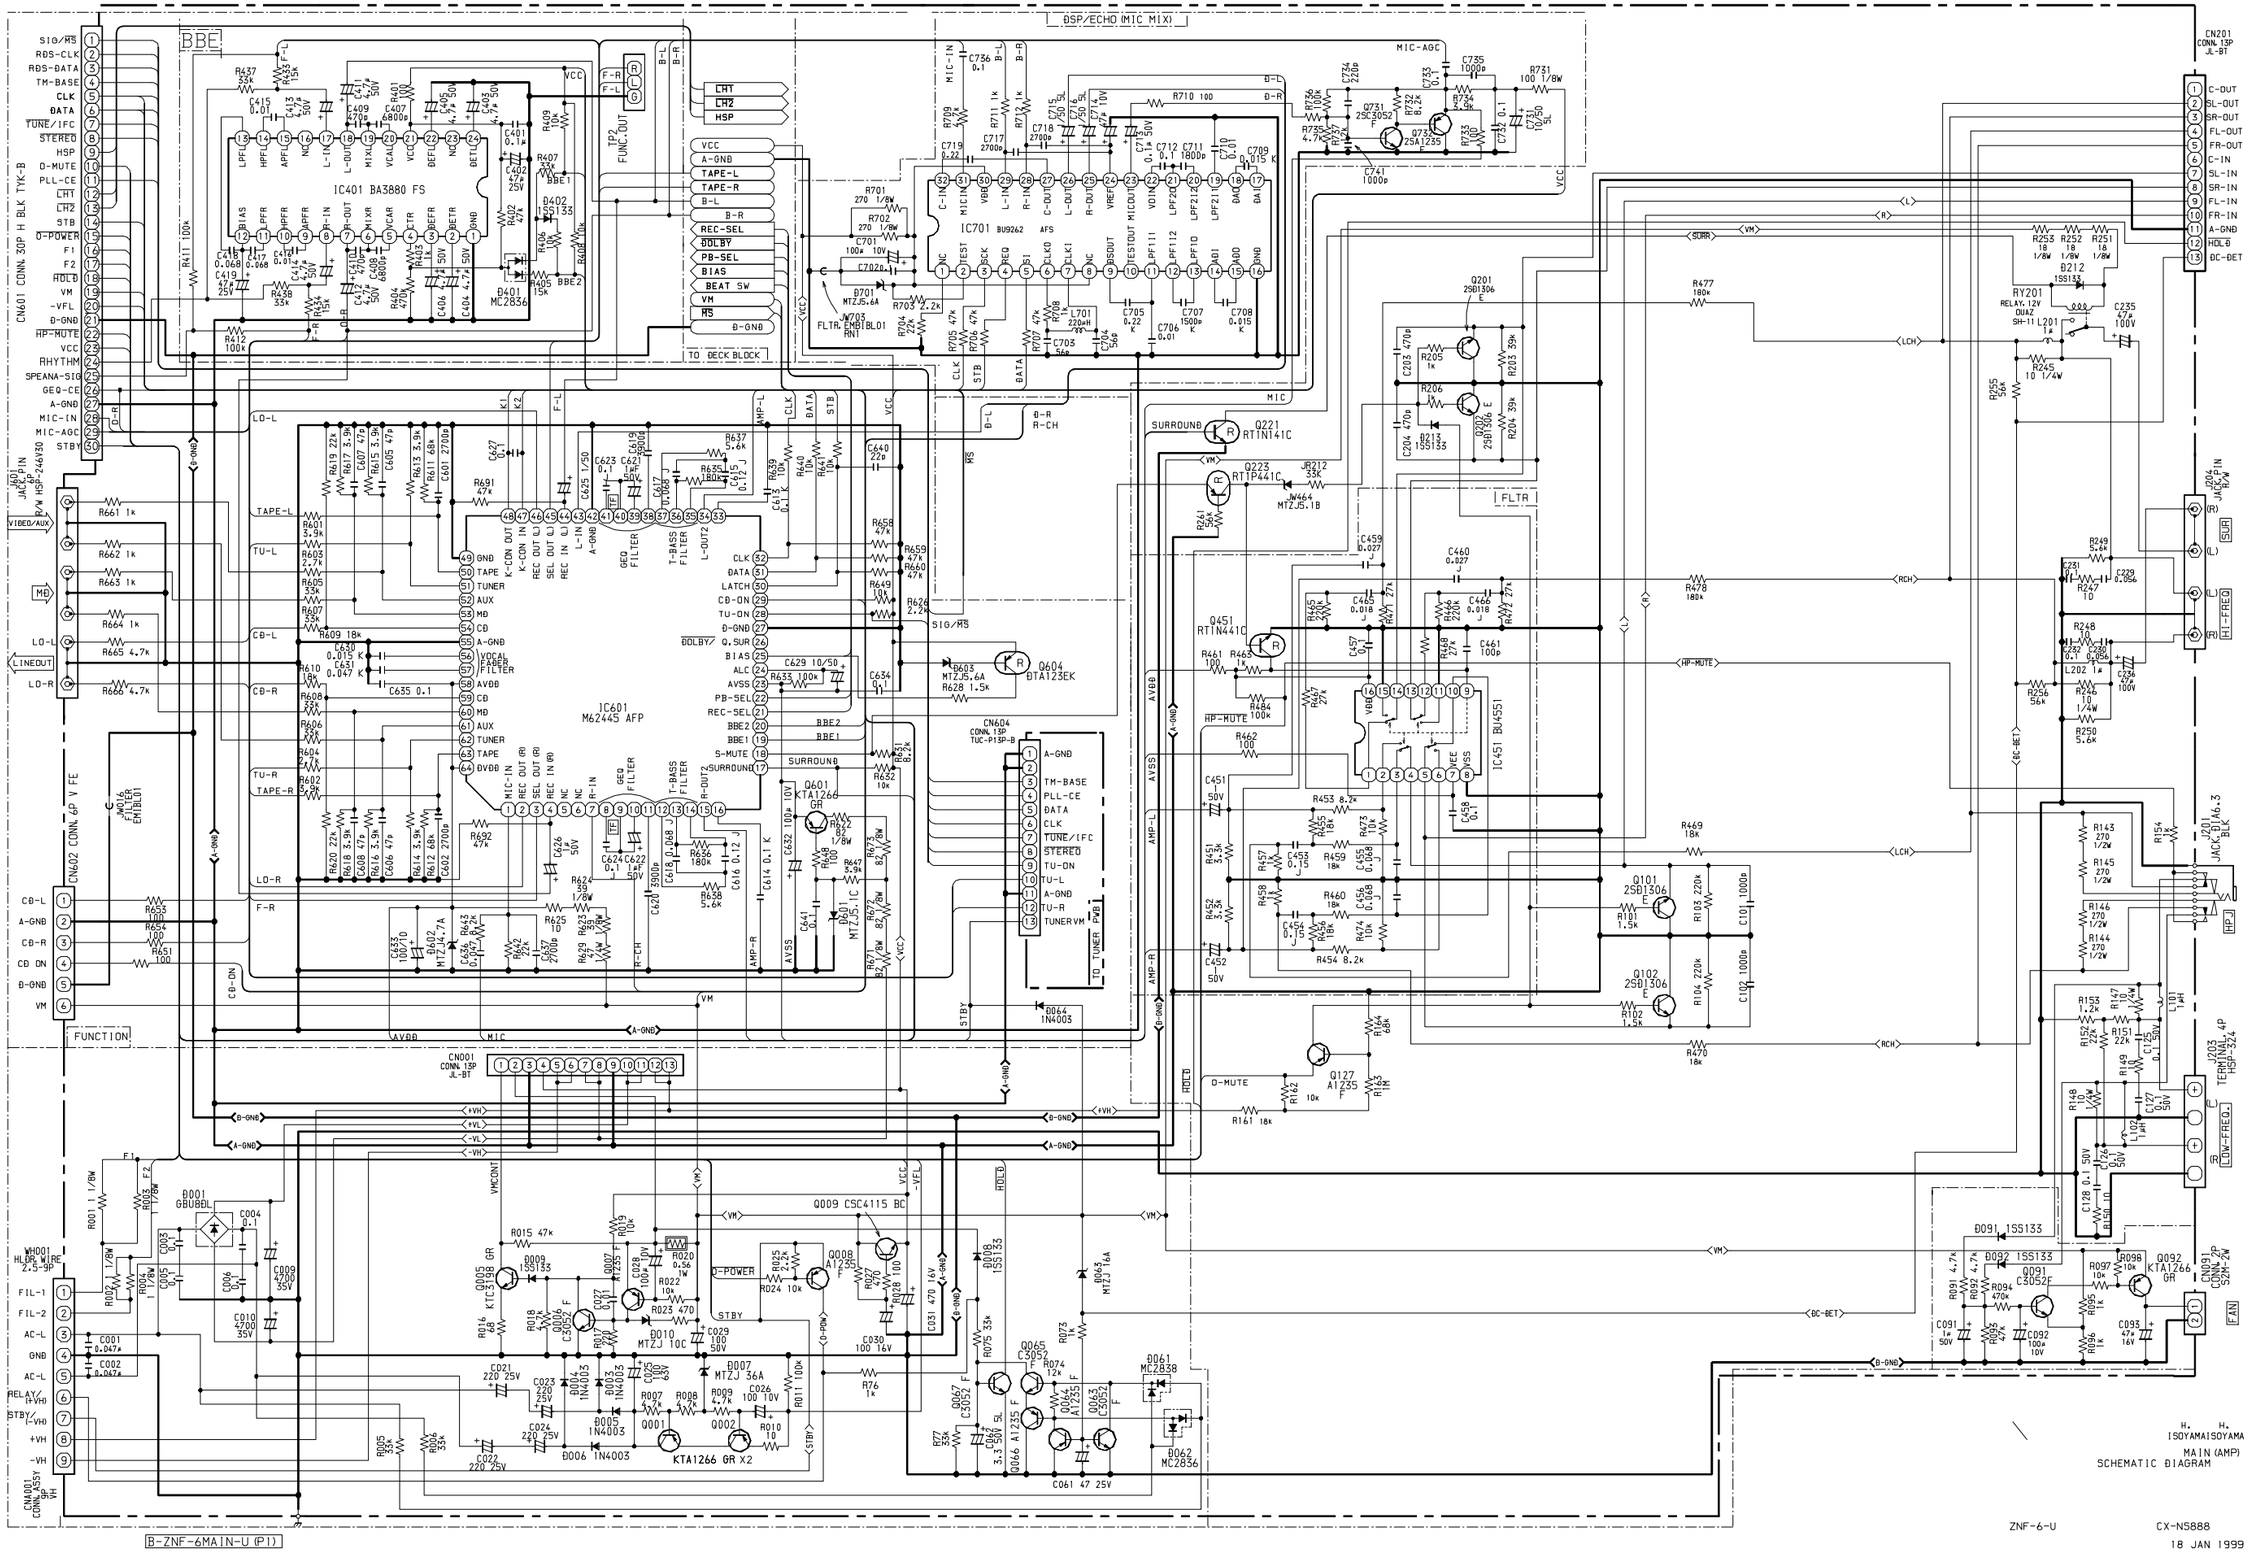

SCHEMATIC DIAGRAM – 2 (MAIN : LH)

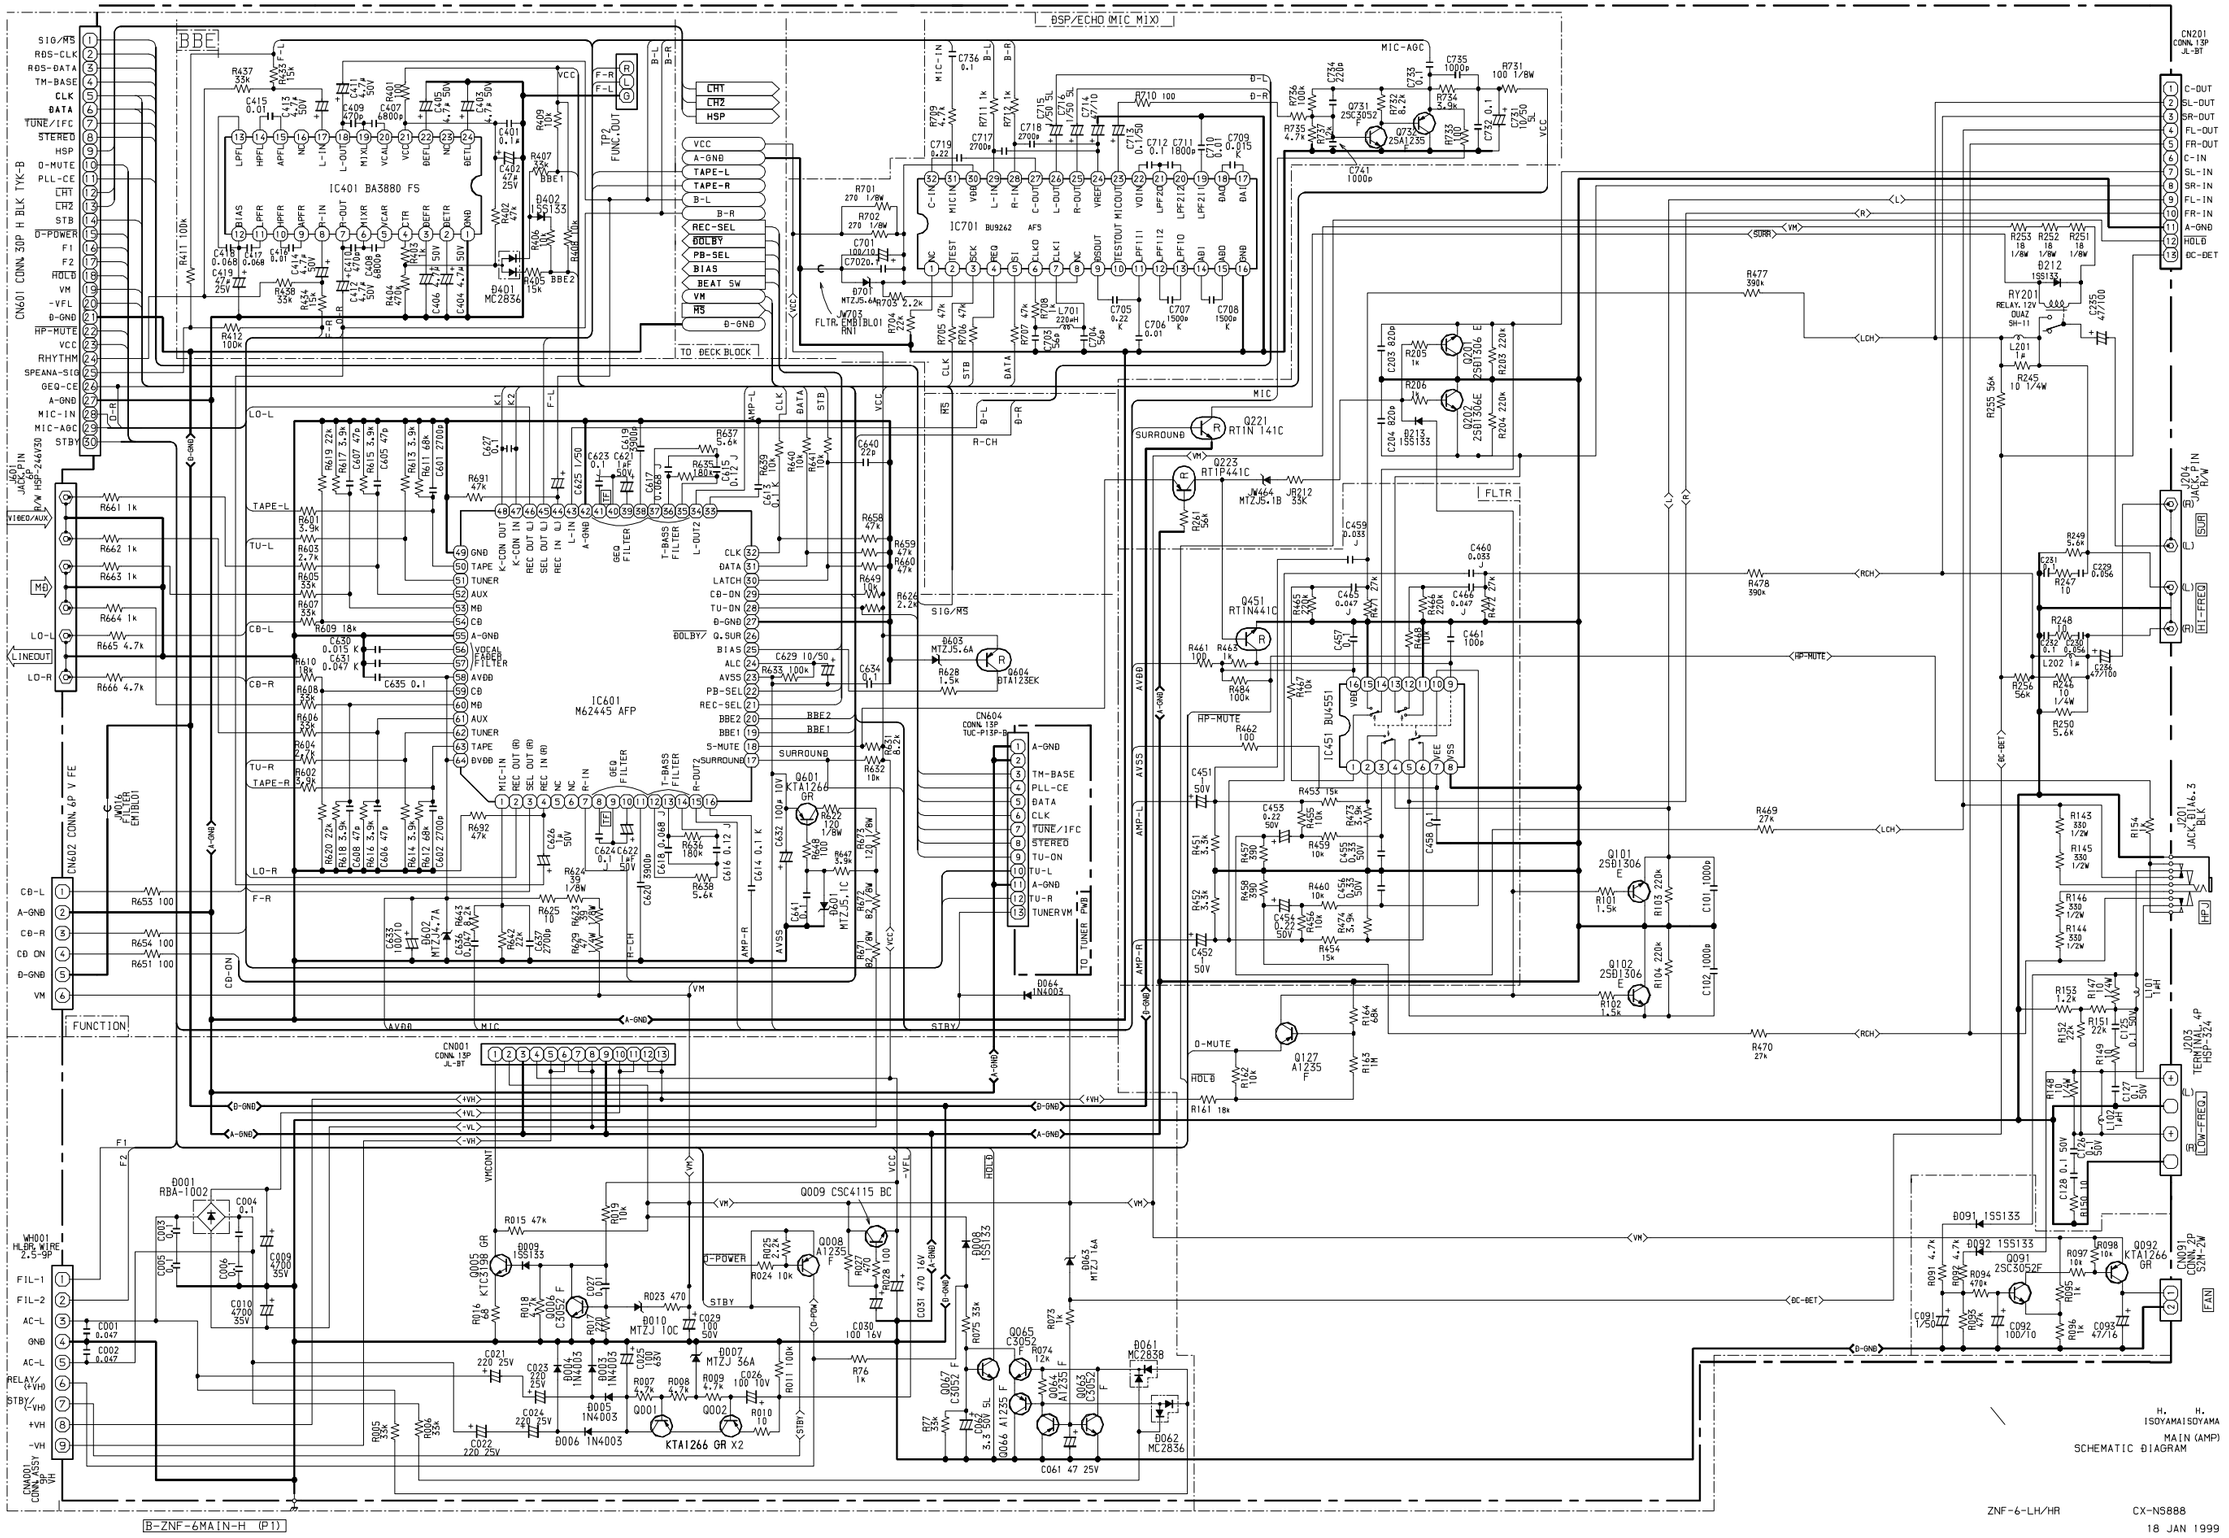

SCHEMATIC DIAGRAM – 3 (TUNER)

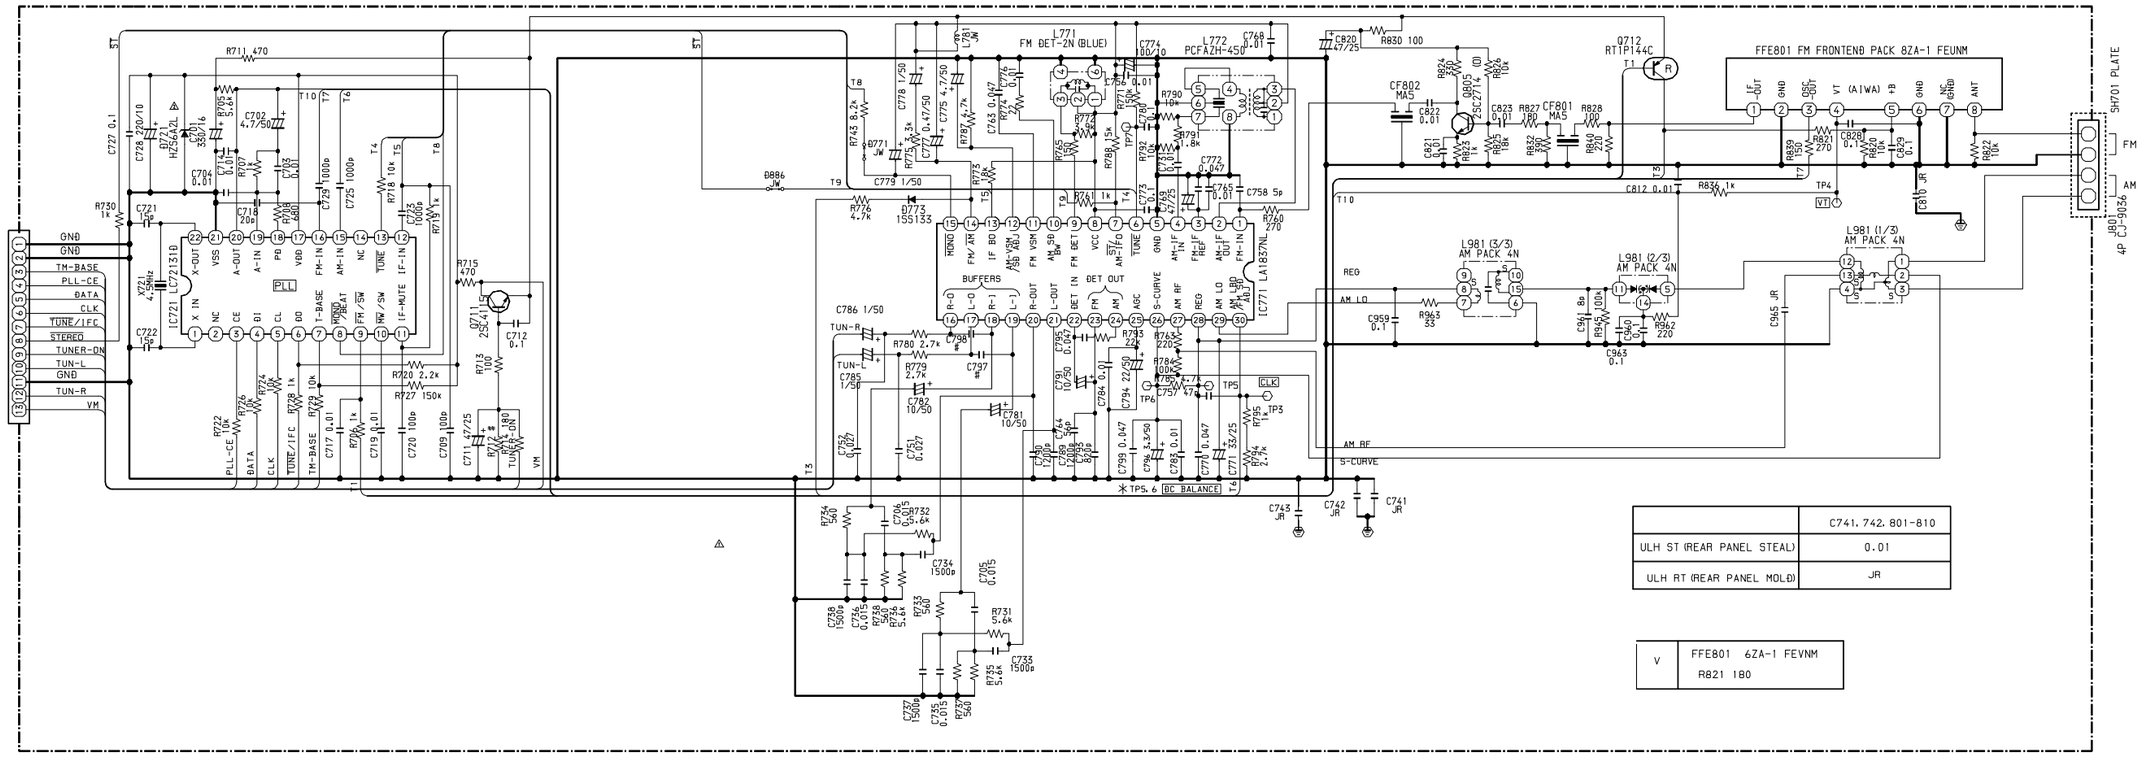
CN701
TUC-P13X-C1
GND
GND
TM-BASE
PLL-CE
DATA
CLK
TUNE/IFC
STEREO
TUNER-ON
TUN-L
GND
TUN-R
VM
IC721 LC72131D
PLL
X-OUT
X IN
VSS
A-OUT
A-IN
PD
VDD
FM-IN
AM-IN
NC
TONE
IF-IN
NC
CE
DI
CL
DO
T-BASE
MPX BEAT
FM/SW
AM/SW
IF-MUTE
X721 4.5MHz
L771
FM DET-2N (BLUE)
L772
PCFA2H-450
IC771 LA1837NL
FM MPX
FM IF BO
FM/AM
AM 450 BW
FM VSM
FM DET
VCC
ST/LO
AM-LO
GND
TONE
AM-IF IN
FM-IF OUT
FM-IN
BUFFERS
R-O
L-O
R-I
L-I
R-OUT
L-OUT
DET IN
FM
AM
AGC
S-CURVE
AM RF
REG
AM LO
AM OSC
ADJ
DET OUT
CF802 MA5
CF801 MA5
Q712 RT1P144C
Q801 2SC2714
FFE801 FM FRONTEND PACK 8ZA-1 FEUNM
IF OUT
GND
OSC OUT
VT (AIWA)
+B
GND
NC (GND)
ANT
SH701 PLATE
FM
AM
J801 4P CJ-9036
L981 (1/3) AM PACK 4N
L981 (2/3) AM PACK 4N
L981 (3/3) AM PACK 4N
REG
AM LO
AM RF
S-CURVE
TUN-R
TUN-L
CLK
TP5, 6 BC BALANCE
VT
TP4
R711 470
R715 470
R720 2.2k
R727 150k
R730 1k
R836 1k
C812 0.01
C786 1/50
C785 1/50
C779 1/50
C778 1/50
C775 4.7/50
C774 100/10
C768 0.01
C820 47/25
C822 0.01
C823 0.01
C827 180
C828 0.1
C829 0.1
C810 JR
C959 0.1
C963 0.1
C965 JR
R963 33
R962 220
R960 270
R959 100
C961 8p
C960 0.01
R828 100
R832 18k
R840 220
R841 10k
R839 150
R821 270
R822 10k
R824 220
R826 10k
R827 180
R831 1k
R833 18k
R834 220
R835 10k
R836 1k
C821 0.01
C824 0.1
C826 0.1
C830 0.1
C831 0.1
C832 0.1
C833 0.1
C834 0.1
C835 0.1
C836 0.1
C837 0.1
C838 0.1
C839 0.1
C840 0.1
C841 0.1
C842 0.1
C843 0.1
C844 0.1
C845 0.1
C846 0.1
C847 0.1
C848 0.1
C849 0.1

SCHEMATIC DIAGRAM – 4 (TUNER FRONT END)

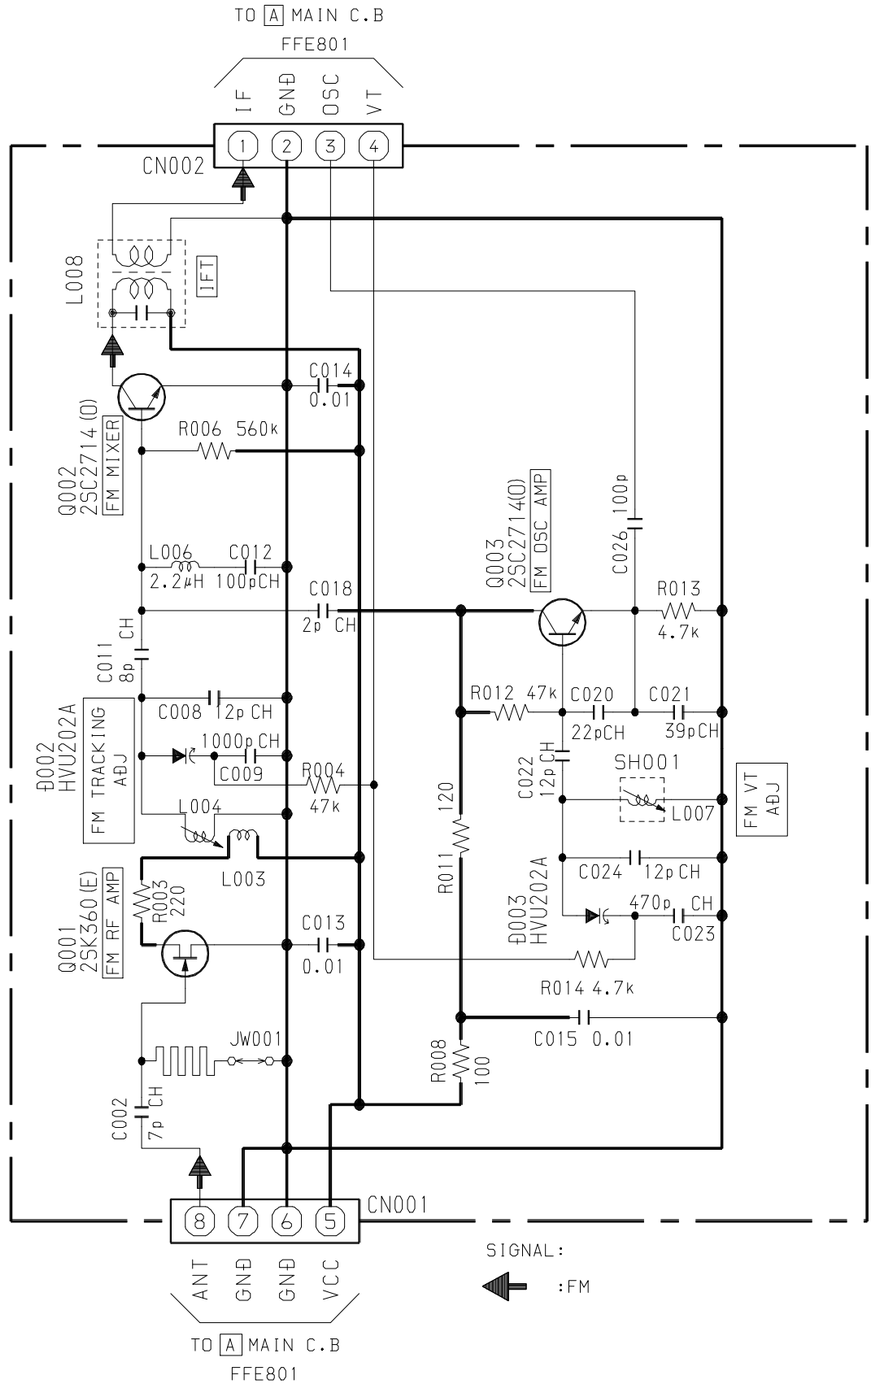

SCHEMATIC DIAGRAM – 5 (FRONT)

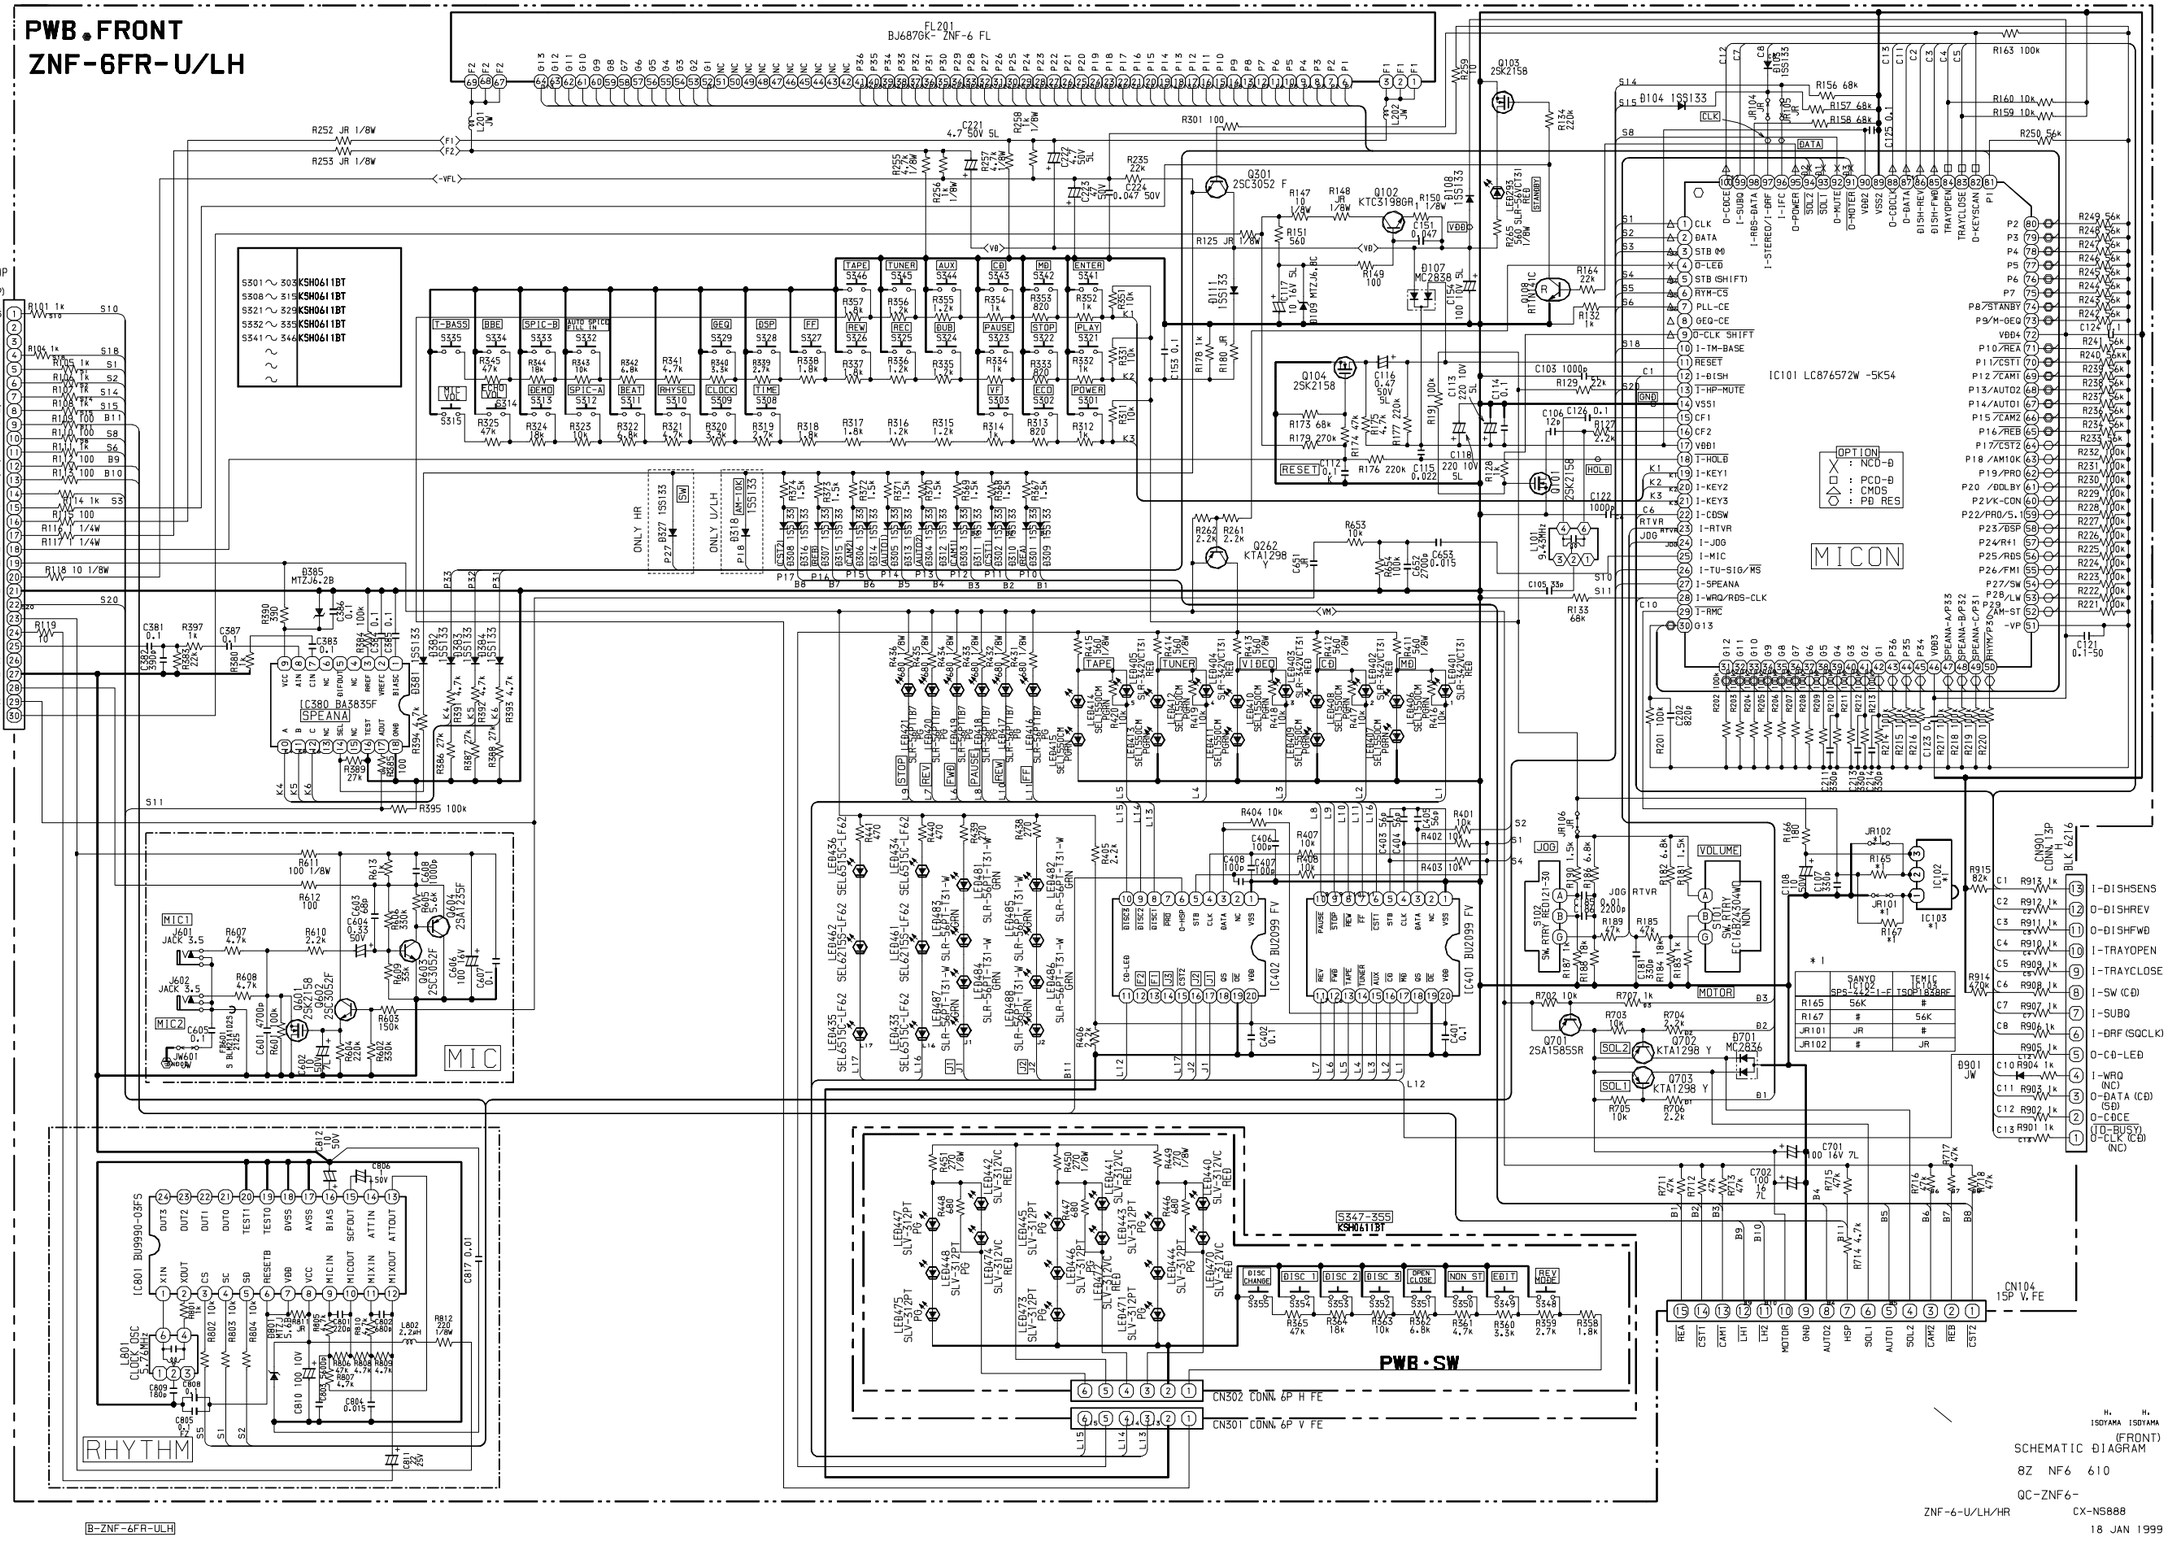

SCHEMATIC DIAGRAM – 6 (AMP : U)

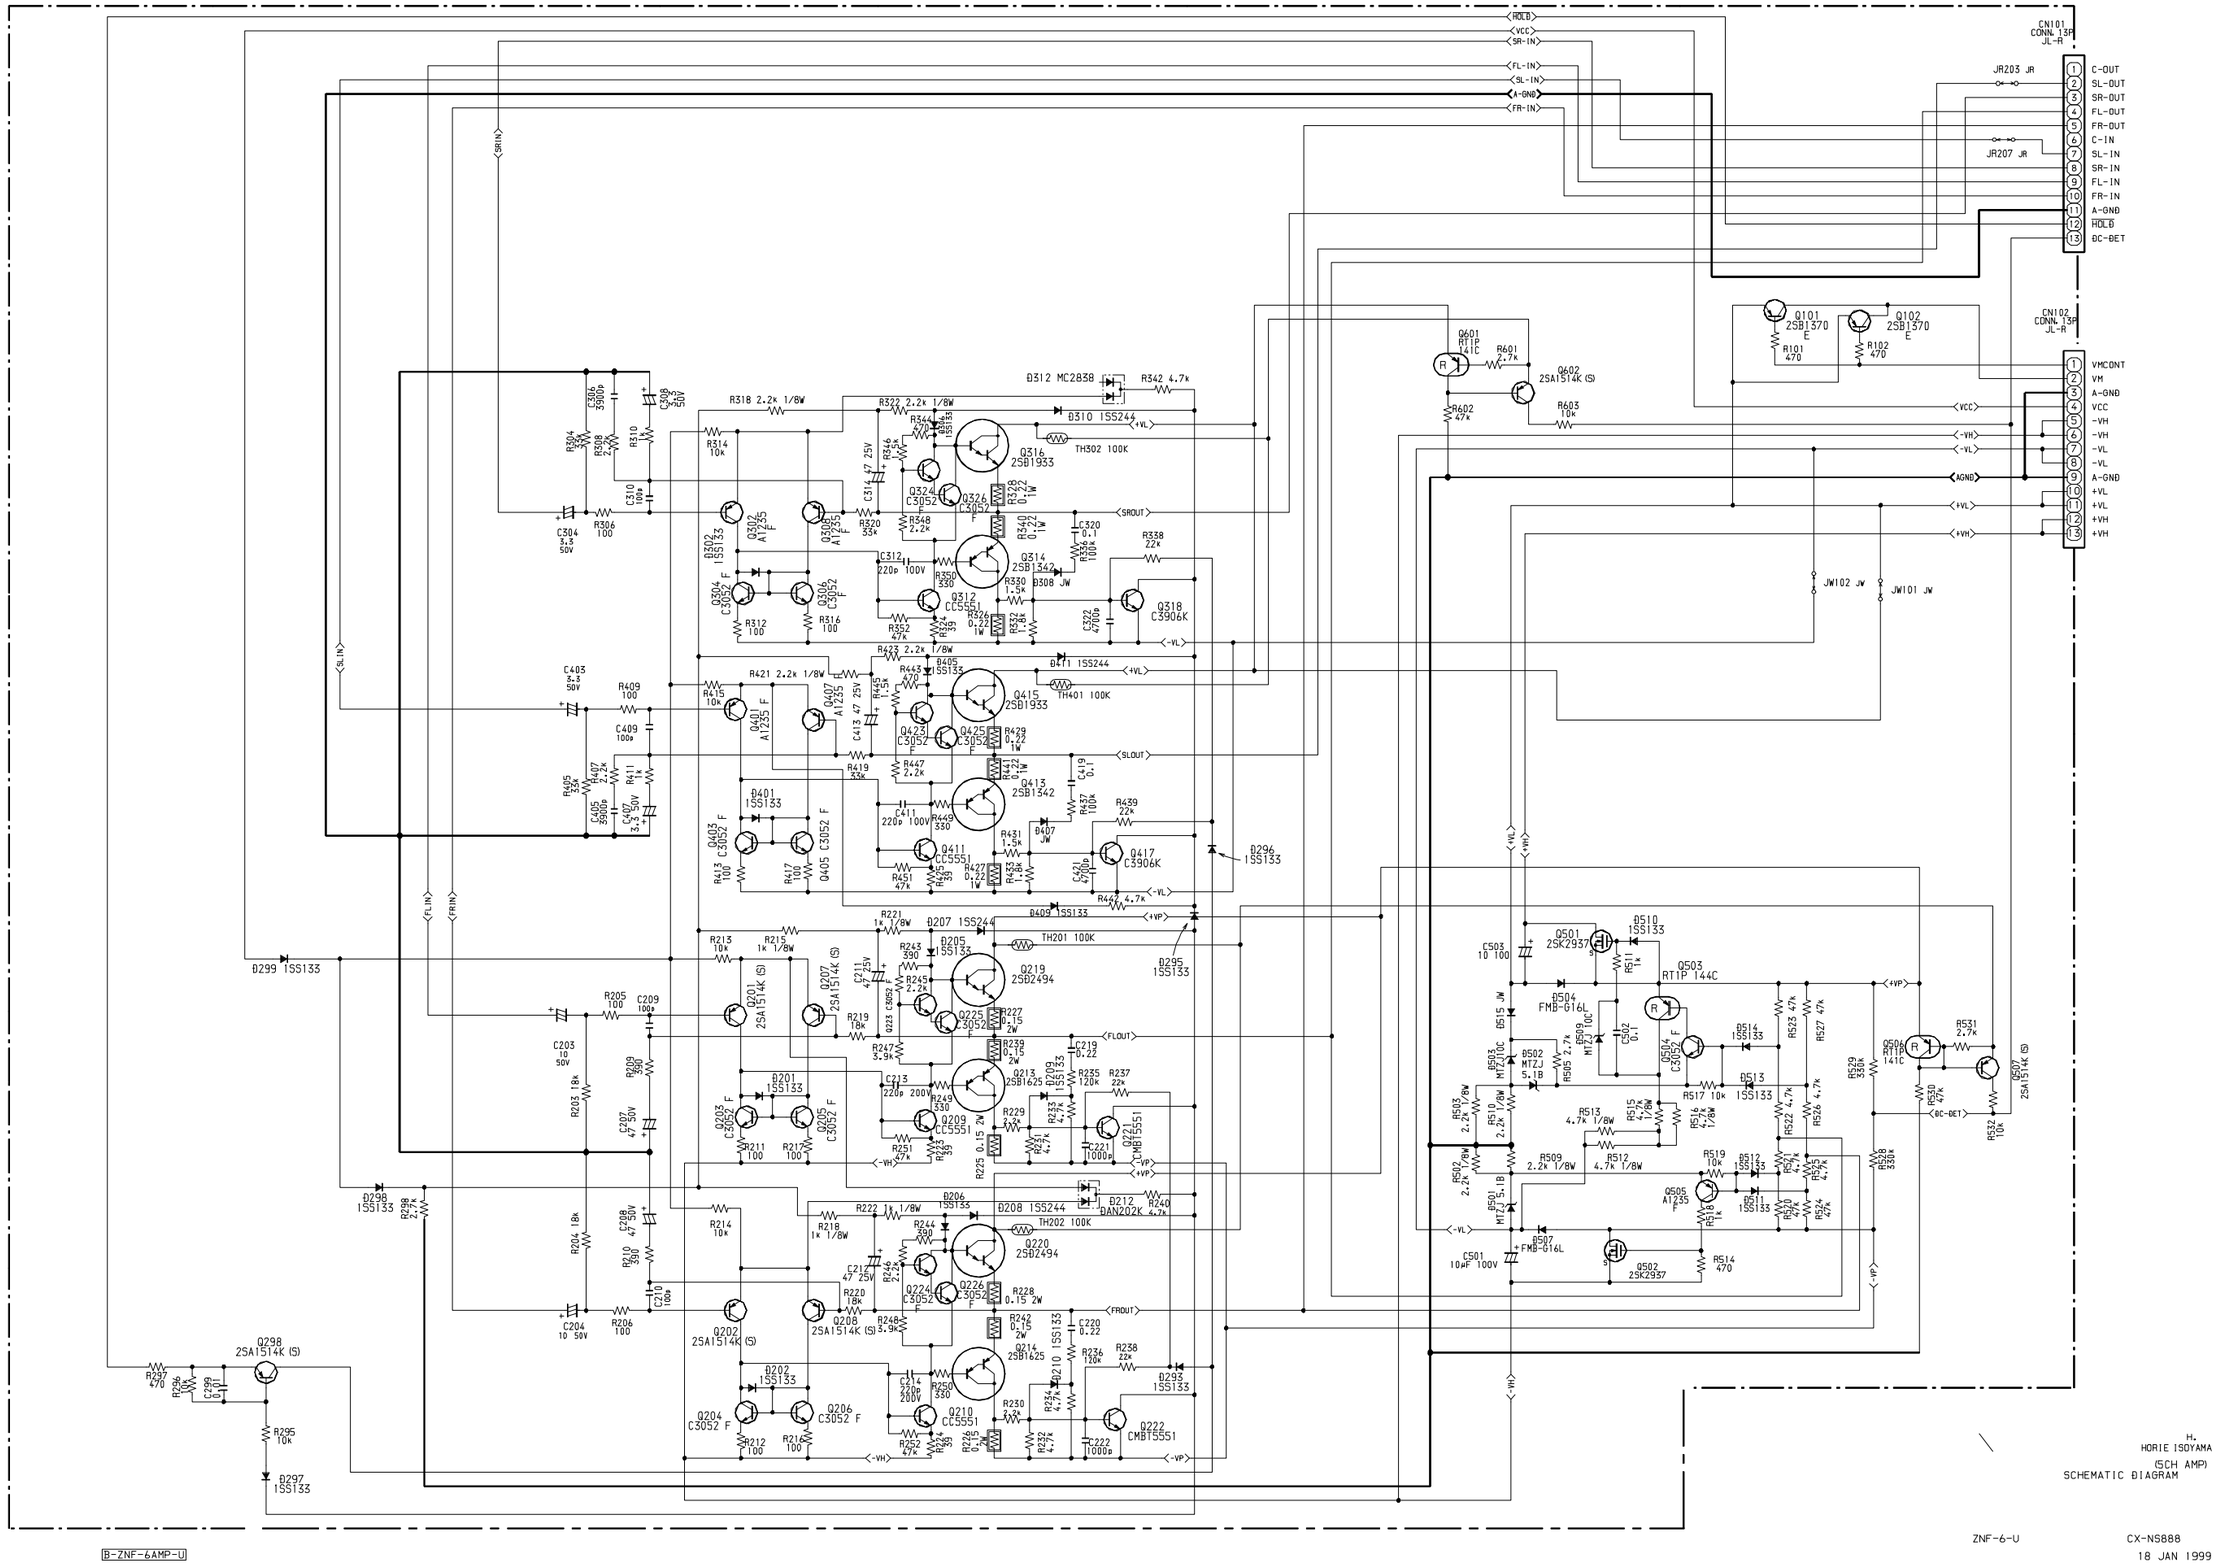

SCHEMATIC DIAGRAM – 7 (AMP : LH)

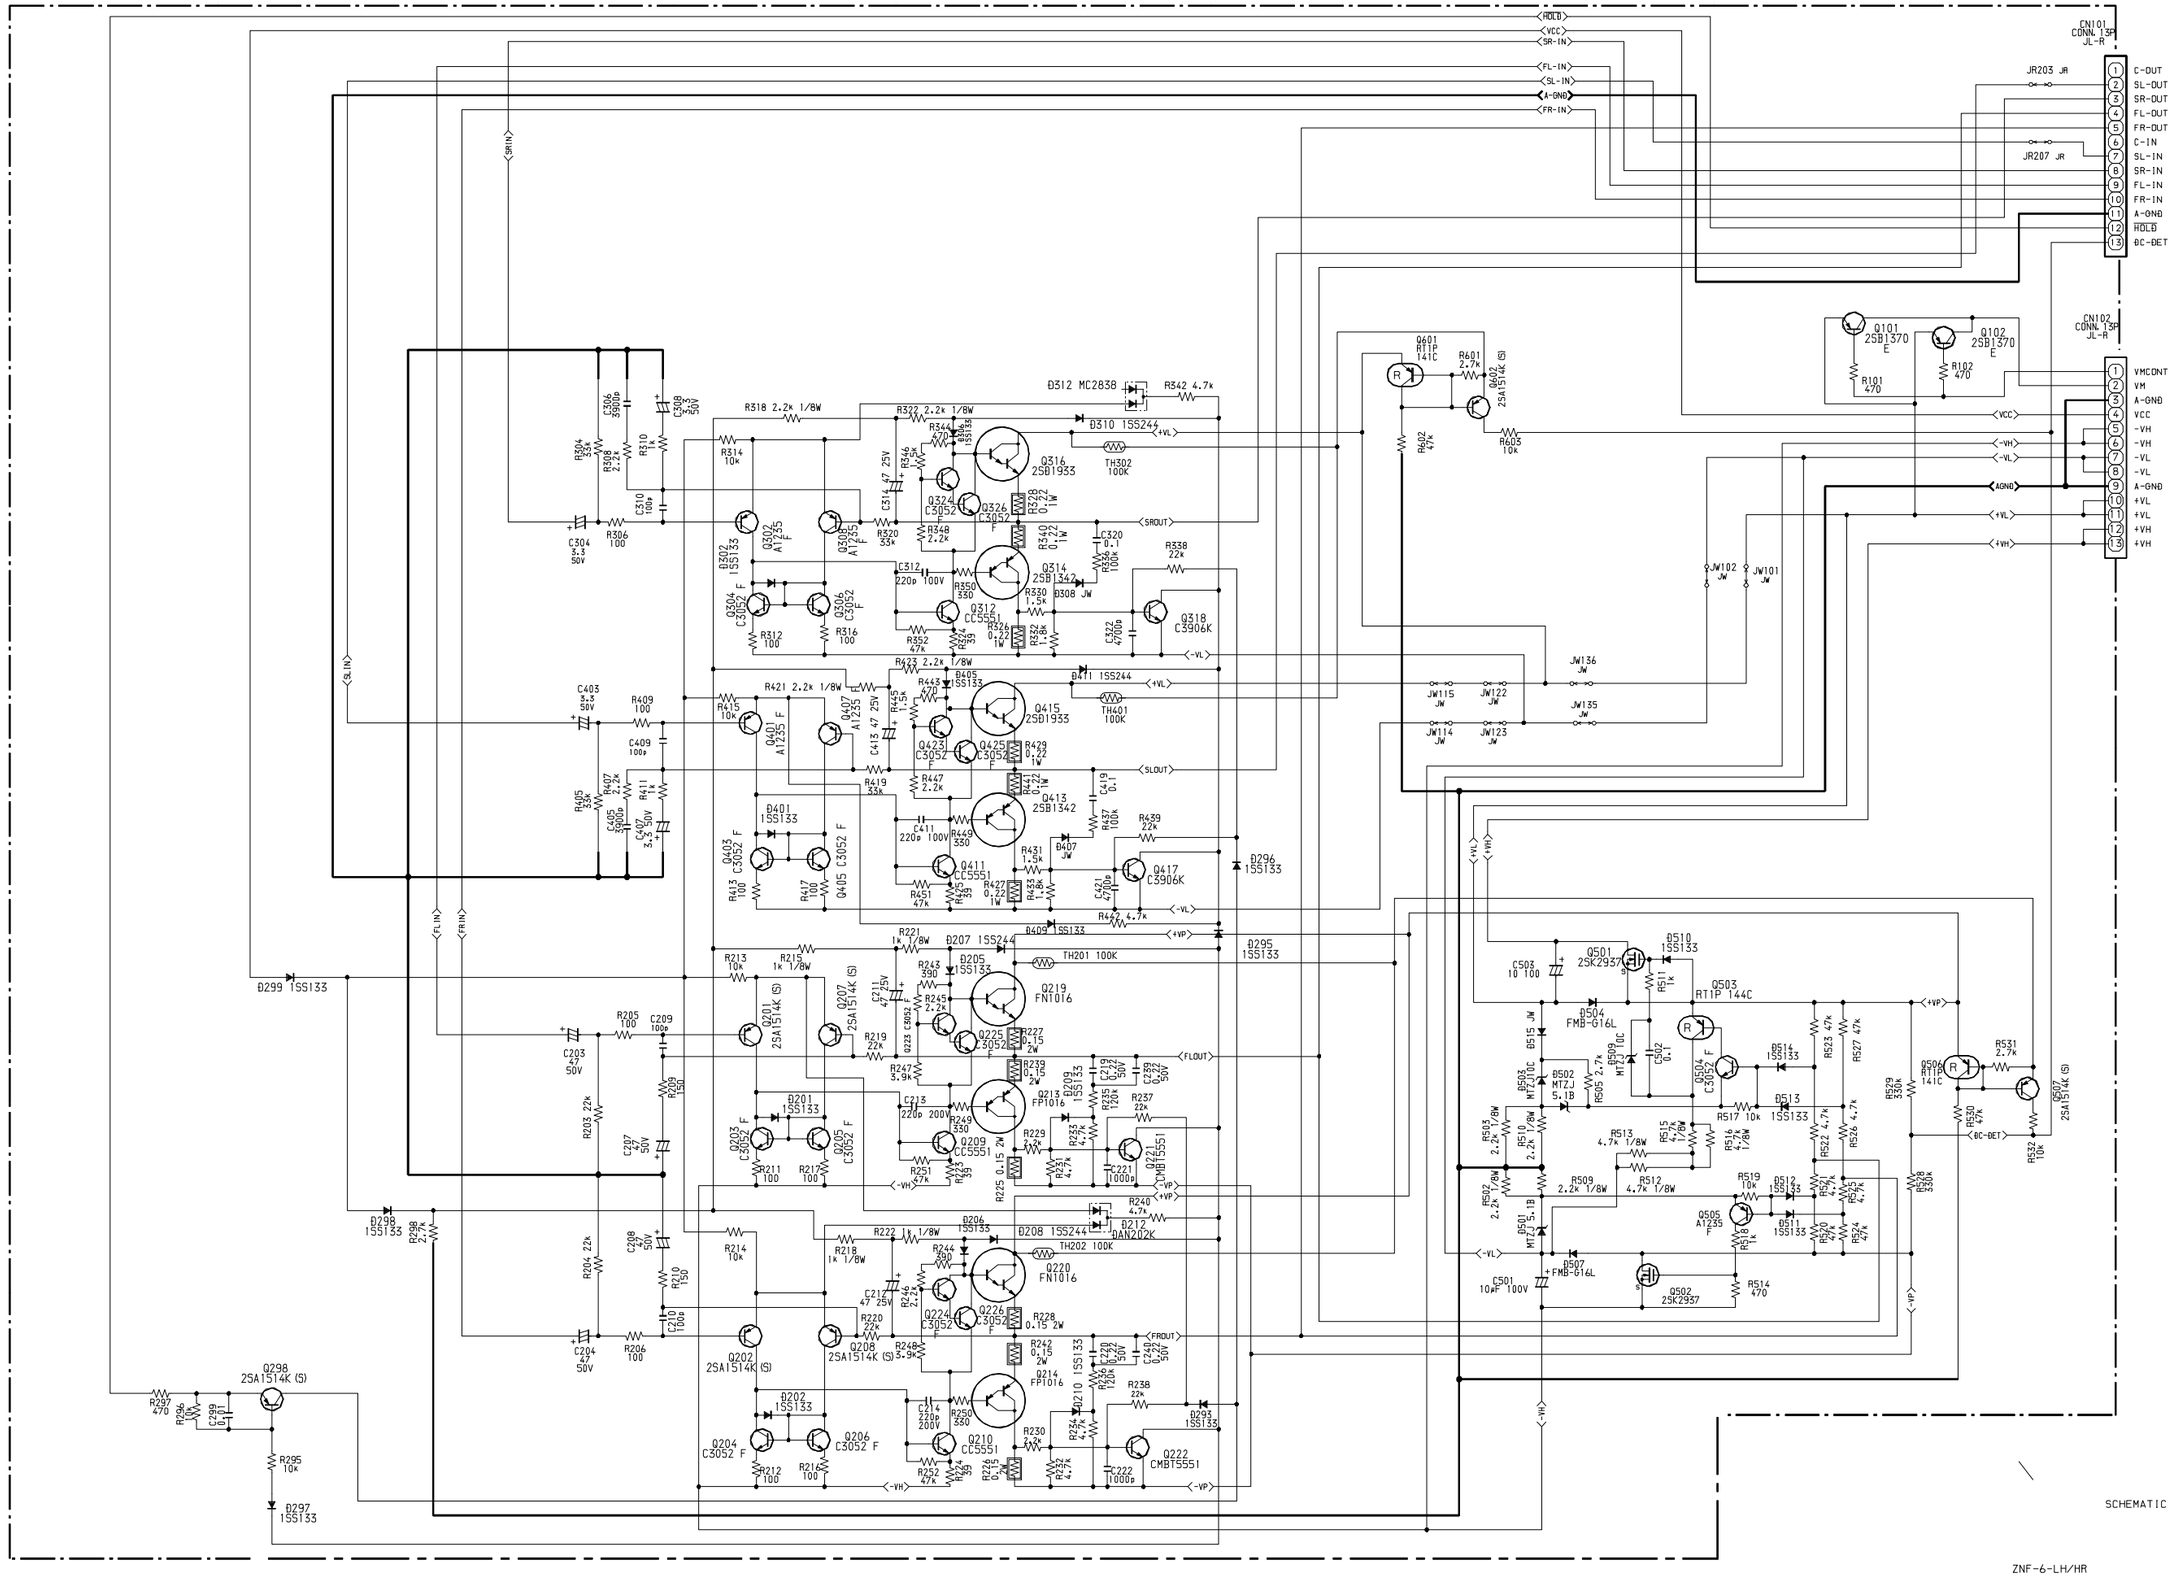

SCHEMATIC DIAGRAM – 8 (PT : U)

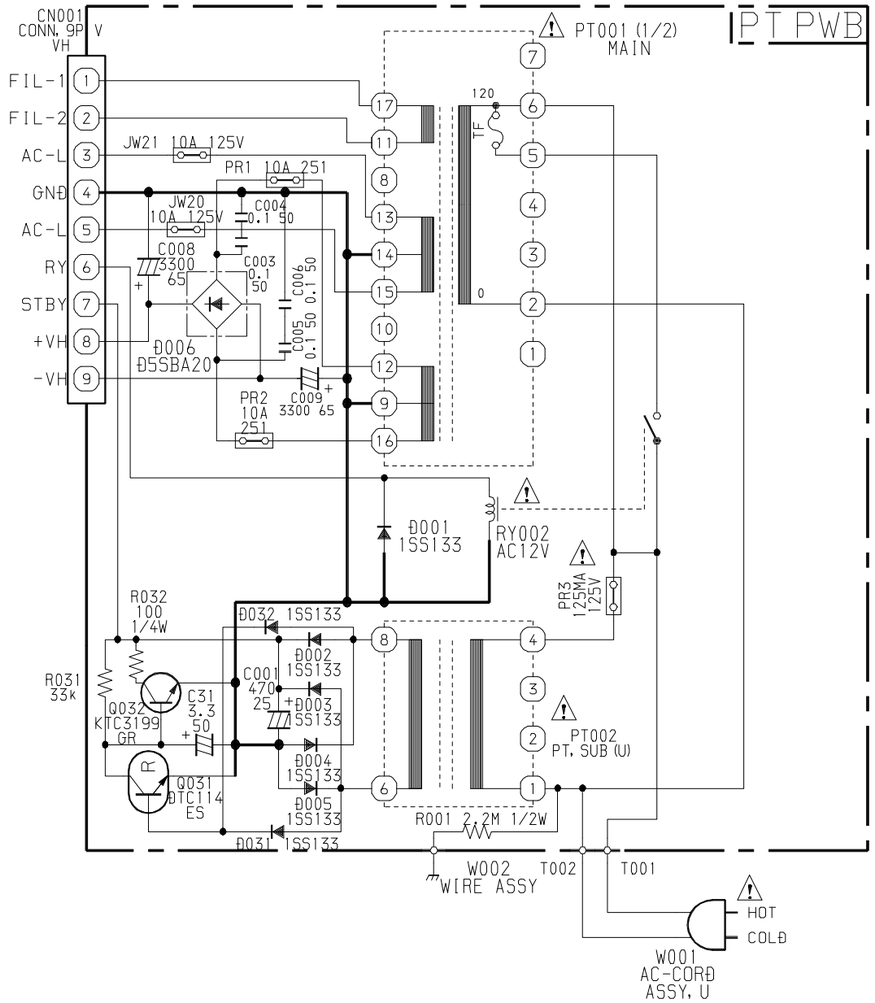

H. H.
ISOYAMAISOYAMA

SCHEMATIC ĐIAGRAM

ZNF-6-U CX-NS888

B-ZNF-6PT-U 18 JAN 1999

SCHEMATIC DIAGRAM – 9 (PT : LH)

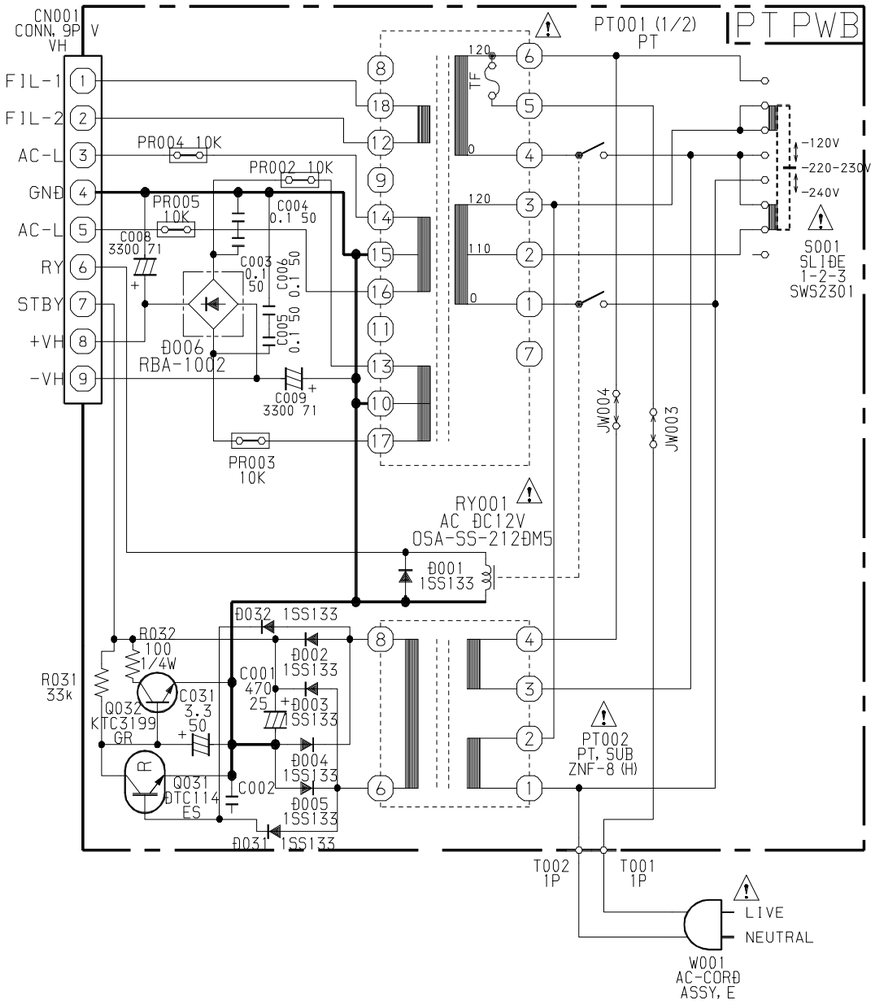

H. ISOYAMA H. ISOYAMA

(PT)

SCHEMATIC DIAGRAM

ZNF-6-LH/HR CX-NS888

B-ZNF-6PT-H

18 JAN 1999

サービス技術ニュース	
番号	連絡内容
G－　－	
G－　－	
G－　－	

アイワ株式会社
AIWA CO.,LTD.

9301978

Tokyo Japan

〒110-8710 東京都台東区池之端1-2-11 ☎03(3827)3111 (代表)

Printed in Singapore